ONE-STOP HEATING SOLUTION



Zhongshan Sield Gas&Electric Appliances Com.,Ltd.
Address:Room 1, 5th Floor, No. 59 Dongfu North Road, Nantou Town, Zhongshan, Guangdong, China.
hako@sield.net
www.sield.net

V.20260410

CATALOG

BUILT-IN KITCHEN APPLIANCES



About Us

Found in 2018, Sield is a high-tech enterprise, located in Foshan city--the hometown of home appliances manufacturing, insisting on entrepreneurship and innovation spirit, devoting ourselves to developing and manufacturing top-qualified kitchen appliances, has become a highly competitive and influential leading company.

With years development, Our company has established a comprehensive management system, with a particular emphasis on research and development as well as quality.

Sield is focusing on innovation and new development. Up to now, we has obtained multiple patents and established strategic partnerships with institutions such as ITS and BV, as well as a witness laboratory.

Sield is focusing on built-in kitchen appliances, including hobs, ovens,range hoods. We also pay closely attention on the key components, have established PCBA factory and coil factory for keep the stable quality.

From material incoming quality control to production process, we guarantee the quality with meticulous attention, to a strict inspection standard.
We introduce the ISO 9001, ISO14001, BSCI management system and ensure that all products pass the corresponding certifications, such as CB,SAA,CE,GS, UKCA, ETL,UL etc.

The sales quantity has been steadily increasing year by year along with the quality,and now our products have been exported to over 100 countries worldwide.

The company keeps living up to the belief of :" Honest selling, best quality and benefits to customers." We are doing everything to offer our customers with best services and best products. We promise the we will be responsible all the way to the end once our services begin.

We warmly welcome long-term cooperation with you.

Facilitiles

- 15000 m^2 factory
- Hobs factory
- PCBA factory
- Coil factory

Quality System

- ISO 9001/14001
- QA equipment and laboratories
- Key parts&process self-made

Products

- Ceramic hob
- Induction hob
- PCBA.Coil

Contents


Induction Hob 01
UL & ETL Series 03
Half-bridge 05
Invisiable Half Bridge Induction Hob 07
TFT Control Induction Hob 11
Full bridge 13
Magnetic Knob Control Induction Hob 15
G4 Platform 17
G3 Platform 19
G2 Platform 27
G1 Platform 36
Built-in Ceramic Hob 42
5 Burner 44
4 Burner 47
3 Burner 50
2 Burner 51
Hob With Downdraft Hood 55
Hybrid Hob 64
Portable & Built-Induction Hob 67
Gas Stove 70
Built-in Electric Oven 73
Cooker Hood 81



BUILT-IN INDUCTION HOB

Various specifications available for coil

160mm




Copper Coil /
Aluminum Coil

Max:1600W

Minimum pan detection:
100mm


180mm



Copper Coil /
Aluminum Coil

Max:1800W
Boost:2000W (5min)
Minimum pan detection:
120mm


200mm



Copper Coil /
Aluminum Coil

Max:1800W
Boost:2200W (5min)
Minimum pan detection:
140mm


210mm



Copper Coil /
Aluminum Coil

Max:1800W
Boost:2600W (5min)
Minimum pan detection:
140mm


280mm



Copper Coil /
Aluminum Coil

Max:1800W
Boost:3500W (5min)
Minimum pan detection:
180mm


320mm



Copper Coil /
Aluminum Coil

Max:1800W
Boost:3500W (5min)
Minimum pan detection:
180mm

190*390mm Flex



Copper Coil /
Aluminum Coil


Max:3200W
Boost:3600W (5min)
Minimum pan detection:
120mm

200*400mm All Flex



Copper Coil /
Aluminum Coil

Max: 3200W
Boost: 3600W (5min)
Minimum pan detection:
80mm

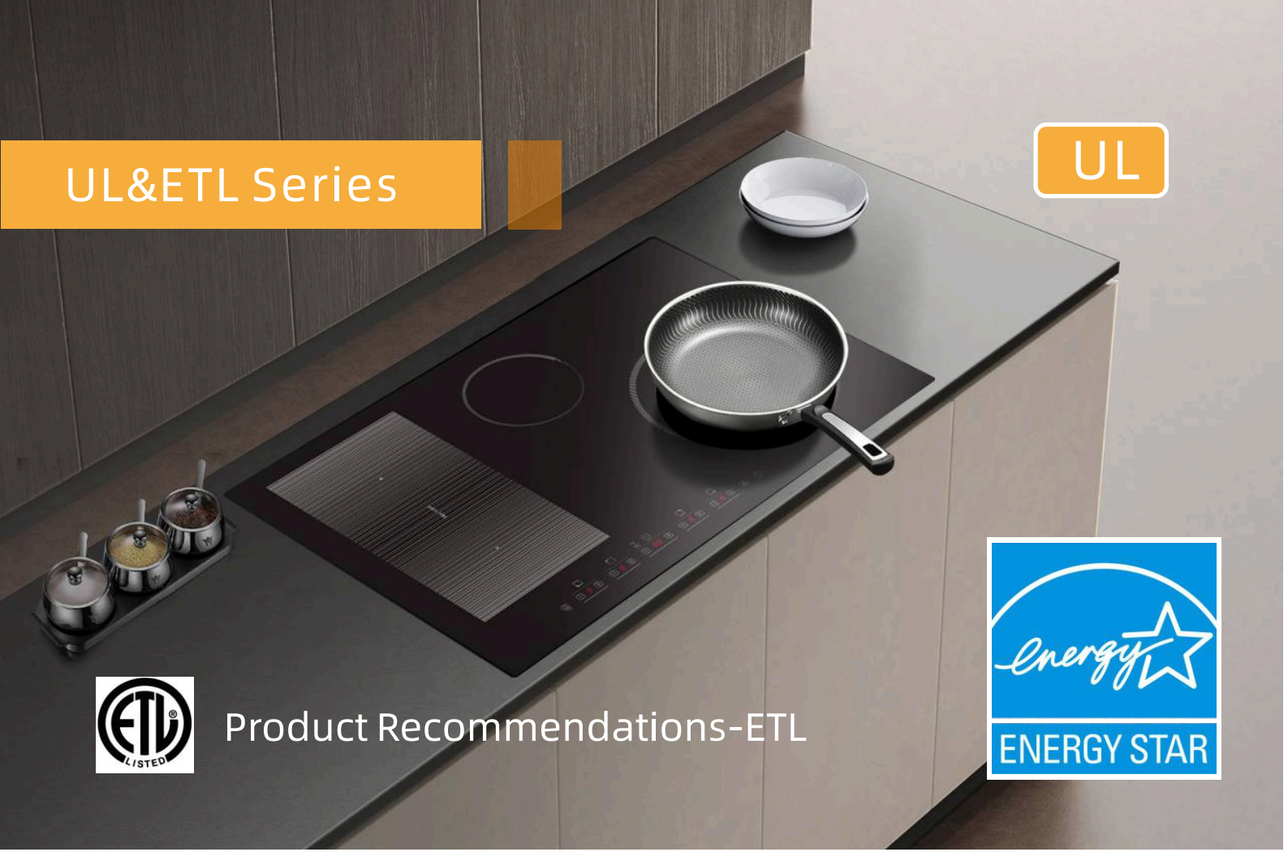

UL&ETL Series


UL

Product Recommendations-ETL

ENERGY STAR

- Metal bottom
- wound plastic coils + double fans
- Maximum total power: 7200W
- The power is higher than G1, more stable
- Optional kinds of coils:
- 180*180mm/ 160+280mm






280mm Large heating coil 3000W High power



Higher thermal efficiency



Touch operation convenient and clear




Mechanical module


PK-M572104-F1-MB-9052

Features

- 7200W (limited power)
- Slider touch Control
- Booster
- Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Dmensions	Packing Size	40HQ
900*520*62.5mm	860*490mm	1040*650*185mm	559PCS

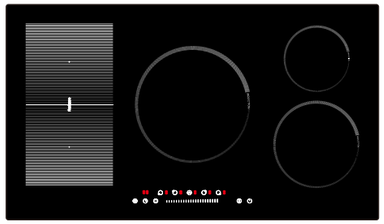

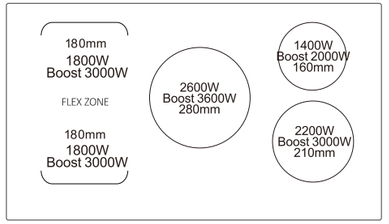



PK-M472104-F1-MB-7752

Features

- 7200W (limited power)
- Slider Control
- Booster
- Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Dmensions	Packing Size	40HQ
770*520*62.5mm	740*490mm	885*138*648 mm	835PCS






PK-M47233-F1-MB-7752

Features

- 7200W
- Touch Control
- Booster
- Flex Zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Dmensions	Packing Size	40HQ
770*520*90mm	740*490mm	940*205*600 mm	559PCS





Half-bridge

Half-bridge Technology

1. Inverter: 200W hardware low power continuous heating
2. Single burner max power: 3500w
3. Good noise control
4. Stable, continuous, and efficient power


HALF-BRIDGE
99 MINUTES TIMER
FLEX ZONE
CHILD LOCK
BOOST


PK-M572106-F1(BQ)

Features

- 7200W (limited power)
- Boost
- Flex Zone
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demension	Packing Size	40HQ
900*520*62.5mm	860*490mm	1040*635*185mm	560PCS

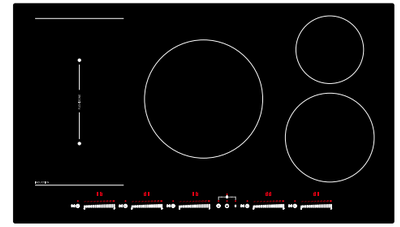

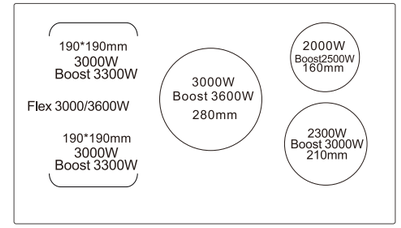


PK-M472133A-F1-7752(BQ)

Features

- 7200W (limited power)
- Boost
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Building Demension	Packing Size	40HQ
770*520*62.5mm	740*490mm	885*138*648mm	836PCS







PK-M472133A-F1(BQ)

Features

- 7200W (limited power)
- Slider control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*62.5mm	560*490mm	705*138*648mm	1026PCS








Invisiable
Half Bridge Induction Hob

PK-M672108-F3(YB)

Features

- 7200W
- Slider Control
- Booster
- Three Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
892.4*452.4*57.5mm	1085*150*640mm	612PCS

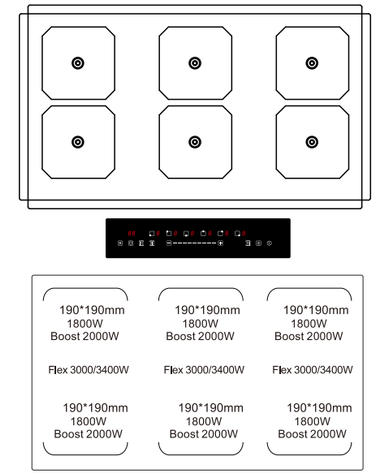

PK-M572108A-F2(YB)

Features

- 7200W
- Slider Control
- Booster
- Two Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- 99 Minutes Timer
- Individual Residual Heat Indicator


Product Size	Packing Size	40HQ
892.4*452.4*57.5mm	1085*150*640mm	612PCS

PK-M47221-F1（YB）

Features

- 7200W
- Boost
- TWO Flex Zone
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
592.5*517.5*57.5mm	705*138*648mm	1026PCS

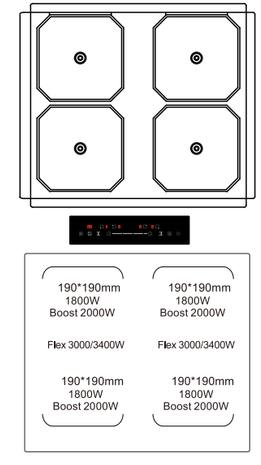


PK-M472125A-F2（YB）

Features

- 7200W
- Boost
- TWO Flex Zone
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
571.2*431.2*57.5mm	655*138*560mm	1368PCS

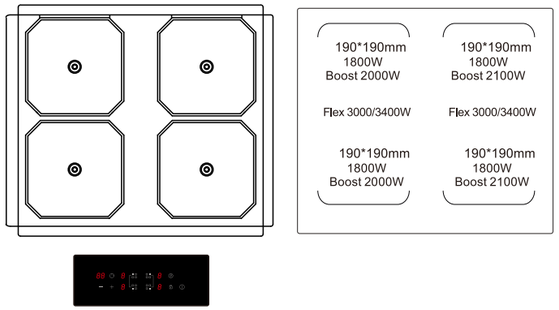


PK-M357125A-F1（YB）

Features

- 5700W
- Boost
- Flex Zone
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
571.2*431.2*57.5mm	655*130*560mm	1368PCS

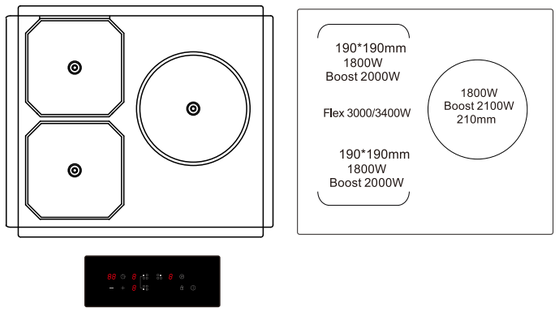


PK-M35721（YB）

Features

- 5700W
- Boost
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
805*440*57.5mm	900*145*565mm	936PCS

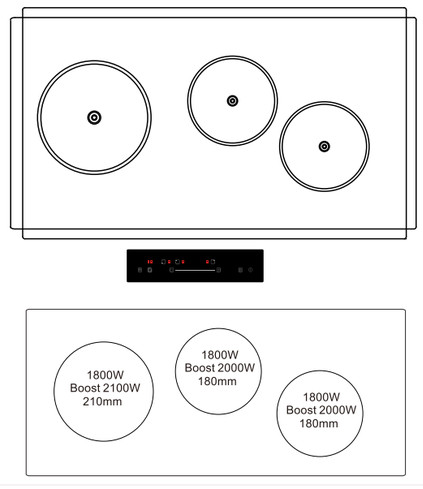


PK-M2H3521-F1(YB)

Features

- 3500W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Packing Size	40HQ
492.4*292.5*57.5mm	555*130*400mm	2420PCS

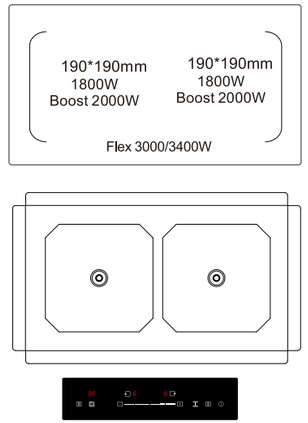


PK-M23521-F1(YB)

Features

- 3500W
- Boost
- Flex Zone
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Packing Size	40HQ
492.4*292.5*57.5mm	555*130*400mm	2420PCS

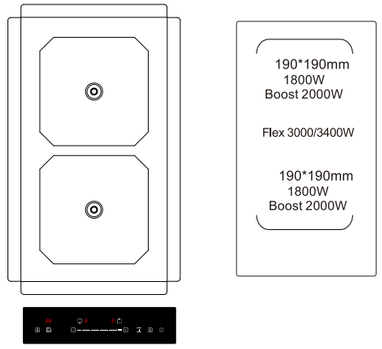


TFT Control Induction Hob




Features

- Power Levels:9
- Any Boost/Rapid Functionally: Yes
- Pan Supports used: no pan limited
- Other notable features:
- With high quality transparent glass
- Sensitive slider touch control
- Redidual heat indicator
- Automatic safety switch off,
- High heat protection
- Child lock/timer

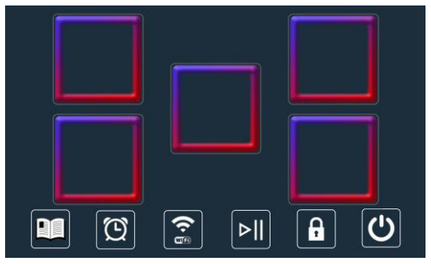

6.8 inch TFT

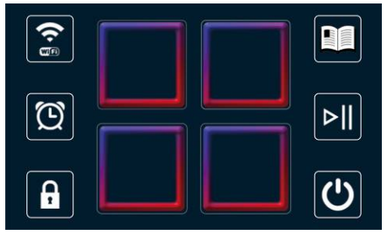

4.3inch TFT




2.8inch TFT


PK-M572103-F2

Features

- 7200W
- Boost
- Two Flex Zones
- Child Lock
- TFT Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	860*490mm	1040*635*185mm	560PCS

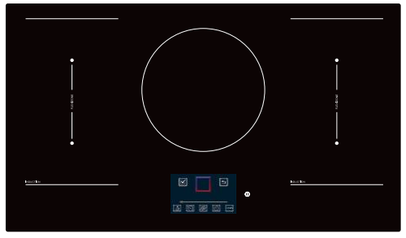

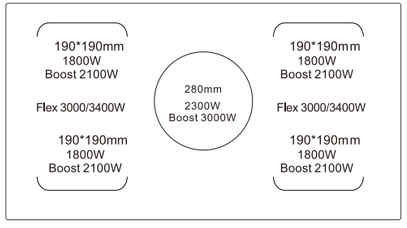



PK-M47297-F2

Features

- 7200W
- Boost
- Pause
- Two Flex Zones
- TFT Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*55mm	560*490mm	705*138*648mm	1587PCS







PK-M472127-F2 2.8inch TFT

Features

- 7200W
- Boost
- Pause
- Two Flex Zones
- TFT Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*55mm	560*490mm	705*138*648mm	1587PCS







PK-M472127-F1 2.8inch TFT

Features


- 7200W
- Boost
- Pause
- Two Flex Zones
- TFT Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*59mm	560*490mm	705*138*648mm	1025PCS







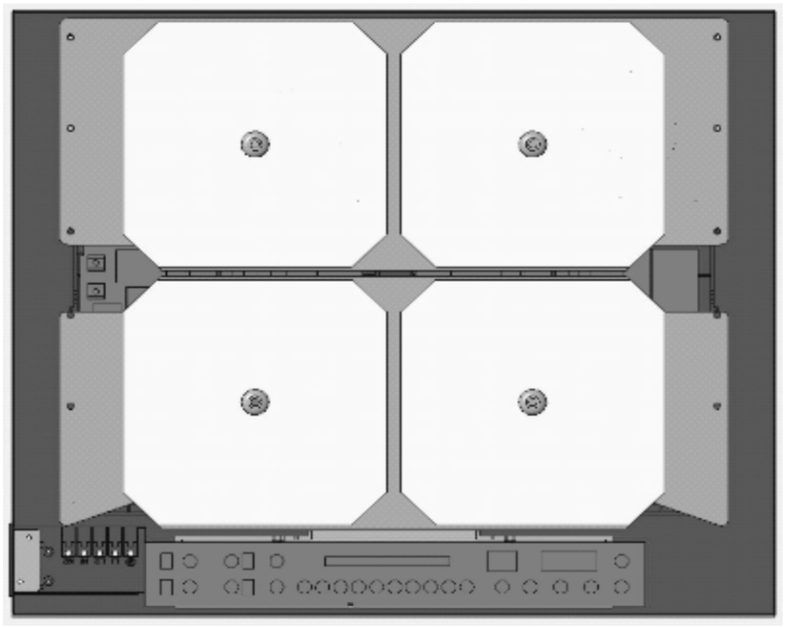


PK-M372143(Q2)-F1




- Power: 7200W
- Dual ring coils: 190mm+190mm；180mm/280mm
- Flex zone: 3000W-3600W
- Dual ring power：2000-2500W(180)；2500-3600W(280)
- Inverter: Hardware 200W continues heating
- Product size: 590*520*60mm
- Excellent low-noise performance

PK-M472143(Q2)-F4

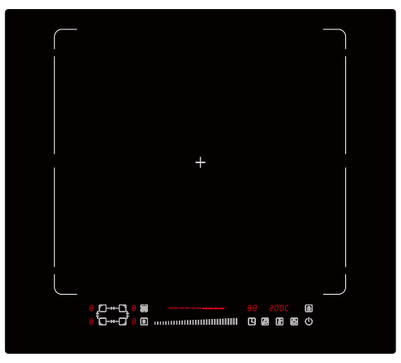

- Power: 7200W
- Coil size：190mm 1800W-3000W（4 unite）
- Flex zone: 3000W-3600W
- Full zone：4800-5600W
- Inverter: Hardware 200W continues heating
- Wireless temperature measurement
- Product size: 590*520*60mm
- Excellent low-noise performance

Full Flex Zone With 6.8 TFT

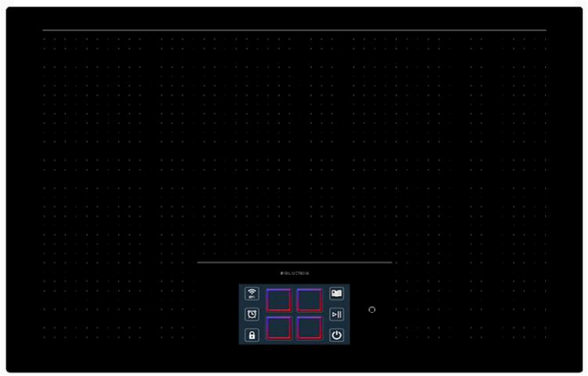

- Full Flexible Zone
- 46 Inter-sensing Coils
- Multi-cookware Recognition
- Wireless temp. measurement






- Magnetic knob
- White display light
- Hidden Display Board


PK-M672136-F3(BQ)

Features

- 7200W
- Magnatic Knob Control
- Booster
- Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
900*550*62.5mm	860*510mm	1060*170*705mm	495PCS

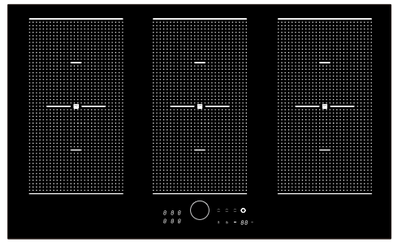

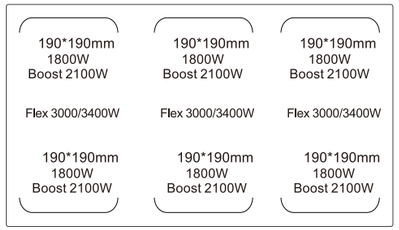



PK-B472123-F2

Features

- 7200W
- Magnatic Knob Control
- Booster
- Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	560*490mm	655*120*585mm	1320PCS







PK-M235135-F1

Features

- 3500W
- Magnatic Knob Control
- Booster
- Flex zone
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
290*520*55mm	272*496mm	585*120*415mm	2376PCS





G4 Induction Hob






- Heat more smooth and even with minimum 400W continuous power
- Total Power: 7200W
- Magnetic knob control Hidden Display
- Power stage: 9 + boost
- 4 in 1 flex zone
- Residual heat indicator
- Pan sensor
- Auto safety switch off
- Over heat protection
- Metal housing more sturdy and durable


PK-M47291-F2(G4)

Features

- 7200W
- Boost
- Pause
- Two Flex Zones
- Magnetic Knob
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*59mm	560*490mm	705*138*648mm	1026PCS







PK-M47291-F1(G4)

Features

- 6600W
- Boost
- Pause
- Flex Zones
- Magnetic Knob
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*59mm	560*490mm	705*138*648mm	1025PCS







PK-M36591-F1(G4)

Features

- 6500W
- Boost
- Pause
- Flex Zones
- Magnetic Knob
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*59mm	560*490mm	705*138*648mm	1025PCS







G3 Platform



- Continuous low-power heating of 200W
- Hole size 560*480
- The overall thickness is 54mm (thinner)
- Standby power consumption<0.3W

PK-B472133-F2(G3)

Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster
- 2 Flex zone

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*490mm	655*105*575mm	1799PCS






PK-B472120-F2(G3)

Features

- 7200W
- Boost
- Flex zone
- Slider Touch control
- Child lock
- Timer function
- Memory function
- Warm function
- Pause function
- 9 Power levels

Product Size	Building Demensions	Packing Size	40HQ
590*520*62.5mm	560*490mm	705*138*648mm	1026PCS






PK-B472154-F2(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster
- Flex zone

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS






PK-B47246-F2(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster
- Flex zone

Product Size	Building Demensions	Packing Size	40HQ
590*520*54m	560*480mm	655*105*575mm	1026PCS






PK-B472156-F2(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS





PK-B47293-F2(G3)

Features

- 7200W
- Boost
- Two Flex Zone
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

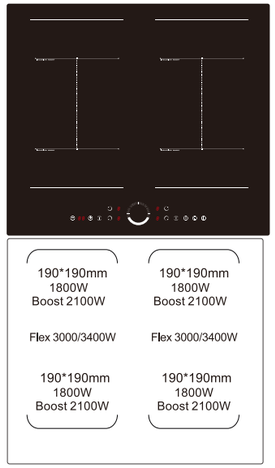


PK-B472141A-F2(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster
- Flex zone

Product Size	Building Demensions	Packing Size	40HQ
590*520*54m	560*480mm	655*105*575mm	1026PCS

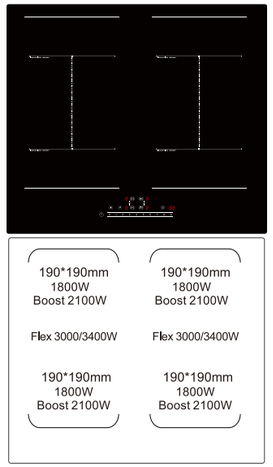


PK-B472125-F1(G3)

Features

- 7200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster


Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

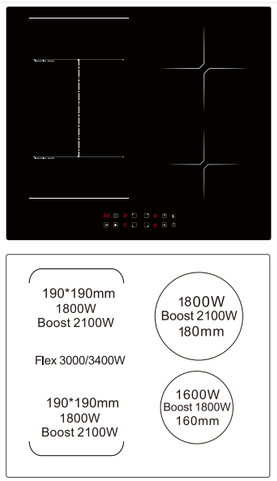

PK-B472156-F1(G3)

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

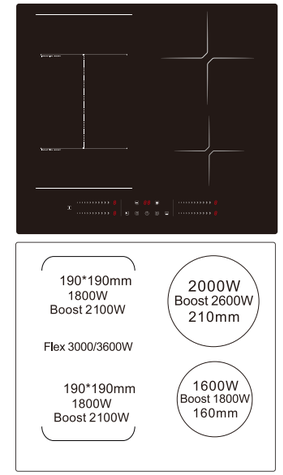


PK-B47296-F1(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster
- Flex zone


Product Size	Building Demensions	Packing Size	40HQ
590*520*55m	560*480mm	705*138*648mm	1026PCS

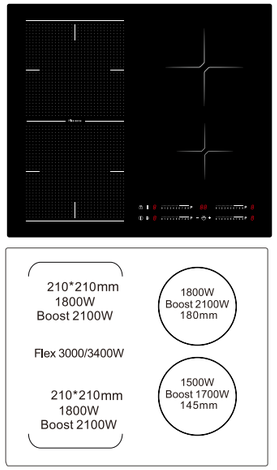

PK-B472156C-F1(G3)

- 7200W
- Bluetooth module
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

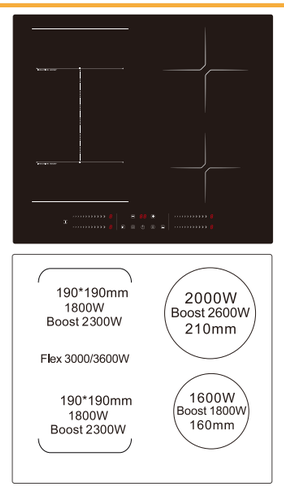



PK-B472133-F1(G3)

Features

- 7200W
- Slider Control
- Booster
- Child Lock
- Timer Function
- 9 Levels Power Setting
- Automatic Safety Switch Off

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS






PK-B472154A-F1(G3)

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS




PK-B472133B(G3)

Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS





PK-B472155(G3)

Features

- 7200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS







PK-B472125A(G3)

Features

- 7200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS







PK-B472133(G3)

Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS






PK-B472156(G3)

Features

- 7200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

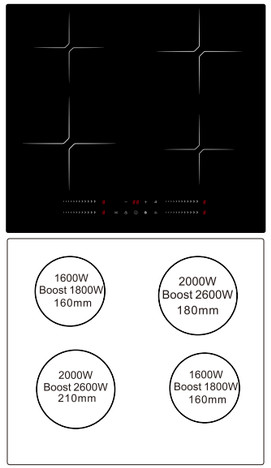


PK-B472154(G3)

Features

- 7200W
- Slider Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

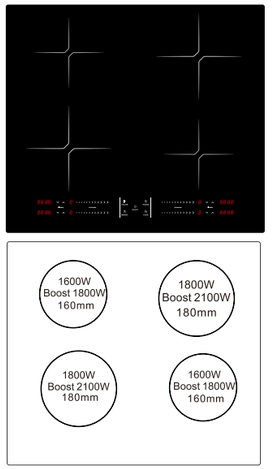


PK-B372125(G3)

Features

- 7200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

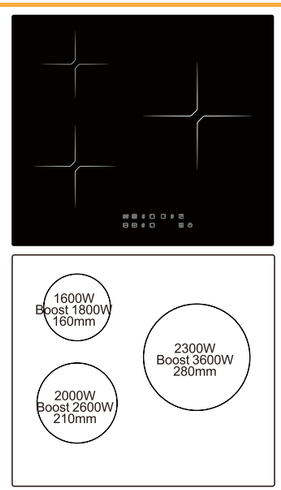


PK-B366133(G3)

Features

- 6600W
- Boost
- Child Lock
- Silder Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*54mm	560*480mm	655*105*575mm	1799PCS

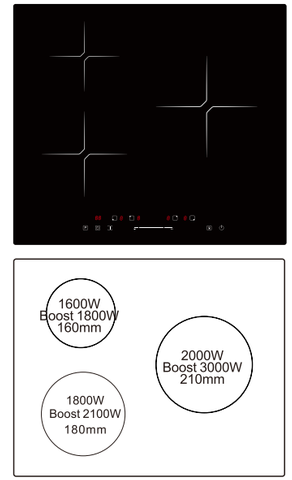


PK-B23587-F1(G3)

Features

- 3500W
- Boost
- Child Lock
- Silder Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
290*520*54mm	265*480mm	575*120*370mm	2816PCS

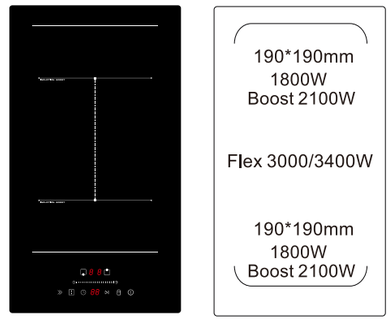


PK-B236125(G3)

Features

- 3600W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Child lock
- Booster

Product Size	Building Dmensions	Packing Size	40HQ
290*520*54mm	265*480mm	575*120*370mm	2816PCS

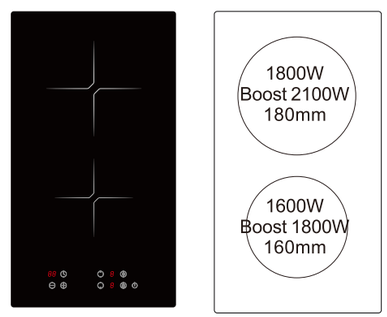




G2 Platform


PK-M57228

Features

- 7200W (limited power)
- Boost
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

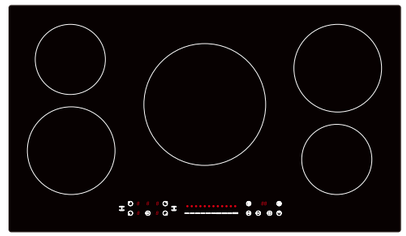

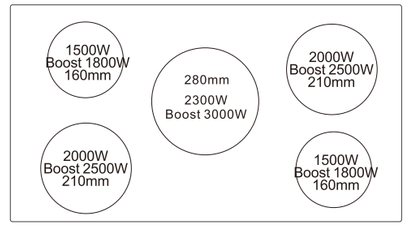



PK-M57235-F1

Features

- 7200W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

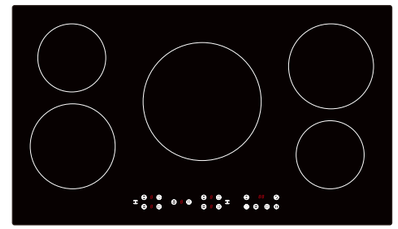

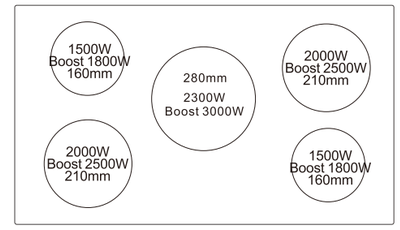



PK-M57228-F1

Features

- 7200W (limited power)Boost
- Boost
- Two Flex Zones
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

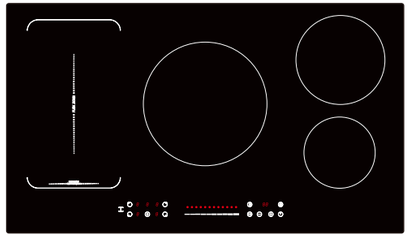

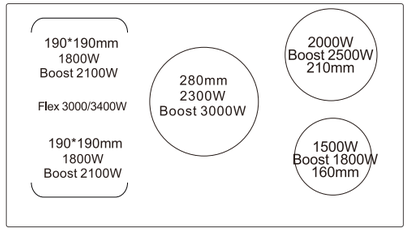



PK-M57235-F1

Features

- 7200W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

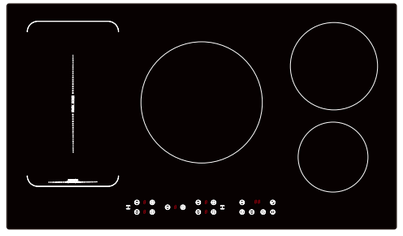

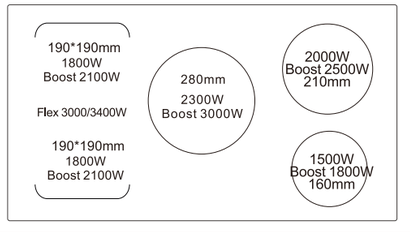



PK-M57228-F2

Features

- 7200W (limited power)
- Boost
- Two Flex Zones
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

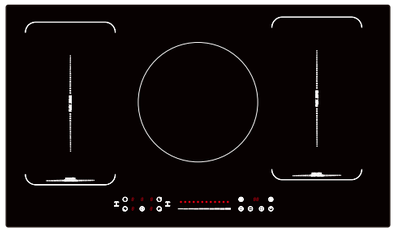

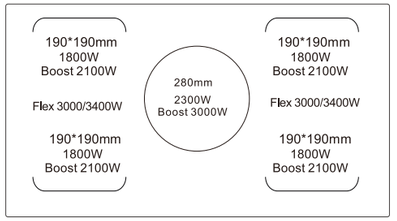



PK-M57235-F2

Features

- 7200W
- Boost
- Two Flex Zones
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
900*520*55mm	872*492mm	1040*165*635mm	640PCS

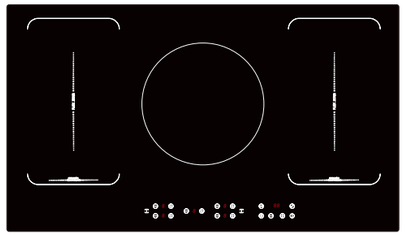

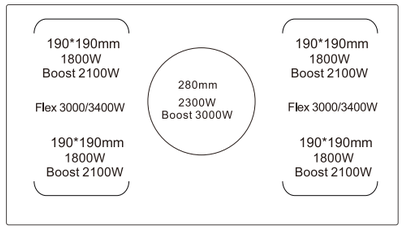



PK-A57208SP-F2

Features

- 7200W
- Boost
- Two Flex Zones
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
770*520*55mm	750*492mm	845*120*585mm	1188PCS

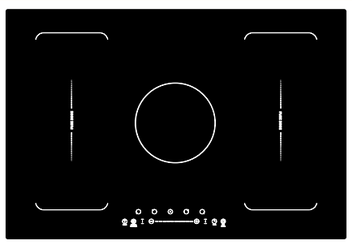

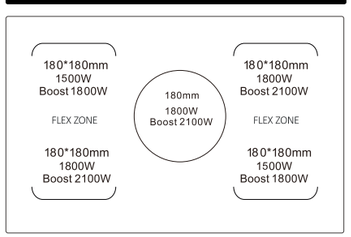



PK-B47221-F1

Features

- 7200W
- Boost
- Flex Zones
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	566*496mm	655*120*585mm	1583PCS







PK-B47221-F2

Features

- 7200W
- Boost
- Flex Zones
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	566*496mm	655*120*585mm	1583PCS







PK-B47219-G

Features

- 7200W
- Independent Slider Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Child lock
- Booster

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	566*496mm	655*120*585mm	1583PCS






PK-M472113

Features

- 7200W
- Boost
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*55mm	560*490mm	705*138*648mm	1026PCS

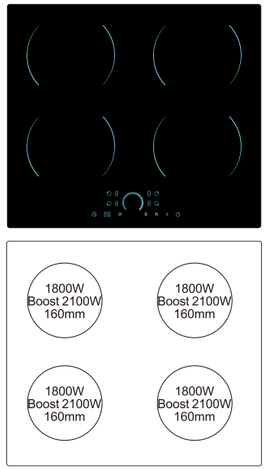


PK-B47221(G2.5)

Features

- Fearures
- 7200W
- Boost
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
580*510*56mm	560*490mm	655*120*585mm	1583PCS

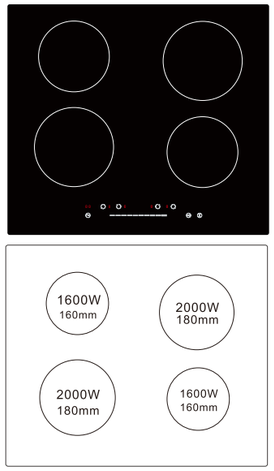


PK-B47221

Features

- 7200W
- Boost
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	566*496mm	655*120*585mm	1583PCS

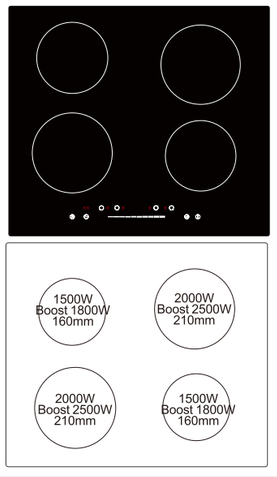


PK-B36806

Features

- 6800W
- Boost
- Pause
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*60mm	566*496mm	655*120*585mm	1583PCS

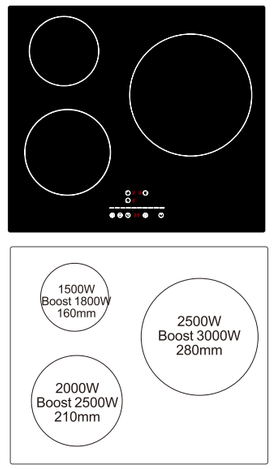


PK-B36519

Features

- 6500W
- Boost
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*57mm	566*496mm	655*120*585mm	1583PCS

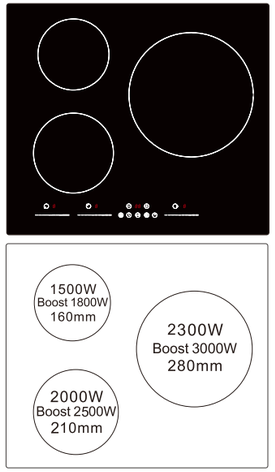


PK-M33306

Features

- 3300W
- Boost
- Pause
- Individual Residual Heat Indicator
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*55mm	565*485mm	735*165*655mm	816PCS

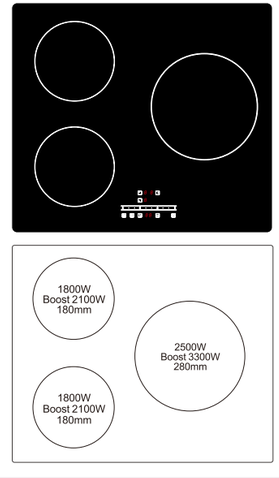



PK-B36521

Features

- 6500W
- Boost
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	566*496mm	655*120*585mm	1583PCS







PK-B36806-F1

Features

- 6800W
- Boost
- Pause
- Flex Zone
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
590*520*60mm	566*496mm	655*120*585mm	1583PCS







PK-M33306-F1

Features

- 3300W
- Boost
- Pause
- Flex Zone
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
580*510*55mm	565*485mm	705*138*648mm	1026PCS







PK-M22351

Features

- 2300W
- Touch Control
- Boost
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Automatic safety shut-off

Product Size	Building Demensions	Packing Size	40HQ
350*525*55mm	330*505mm	605*135*440mm	2014PCS







PK-M23508

Features

- 3500W
- Touch Control
- Boost
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Automatic safety shut-off

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	2727PCS







PK-M22351

Features

- 2300W
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Dmensions	Packing Size	40HQ
525*350*55mm	505*330mm	605*135*400mm	2014PCS







PK-A2H44115-C

Features

- 4400W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
730*430*57mm	710*410mm	795*125*495mm	1365PCS

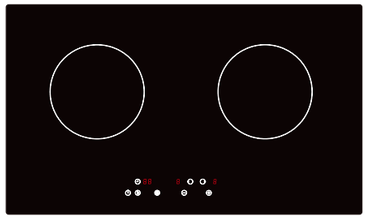

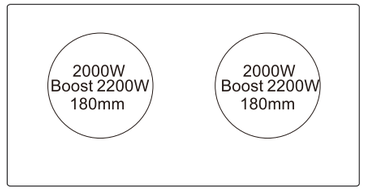



PK-A2H44115

Features

- 4400W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator

Product Size	Building Demensions	Packing Size	40HQ
730*430*57mm	710*410mm	795*125*495mm	1365PCS

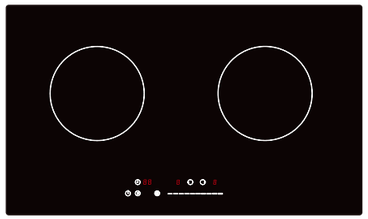

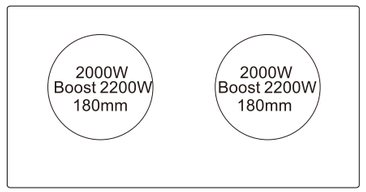



G1 Platform





PK-B46414

Features

- 6400W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	568*498mm	655*120*585mm	1583PCS







PK-B46426

Features

- 6400W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	568*498mm	655*120*585mm	1583PCS







PK-B46406

Features

- 6400W
- Pause
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*56mm	568*498mm	655*120*585mm	1583PCS







PK-B35226

Features

- 5200W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
590*520*60mm	566*496mm	655*120*585mm	1583PCS







PK-B35214

Features

- 5200W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
590*520*60mm	566*496mm	655*120*585mm	1583PCS







PK-B34806 (45)

Features

- Fearures
- 4800W
- Boost
- Silder Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
450*520*60mm	430*496mm	585*120*515mm	1958PCS







PK-B35465

Features

- Fearures
- 5400W
- Boost
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
450*520*60mm	430*496mm	585*120*515mm	1958PCS






PK-B35406(45)

Features

- 5400W
- Boost
- Child Lock
- Silder Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
450*520*60mm	430*496mm	585*120*515mm	1958PCS




PK-B35508(45)

Features

- 5500W
- Touch Control
- Child Lock
- 9 Power Levels
- Overheat Protection

Product Size	Building Demensions	Packing Size	40HQ
450*520*60mm	430*496mm	585*120*515mm	1958PCS

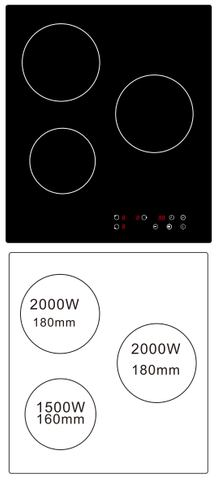


PK-B235111-F1-BS

Features

- 3500W
- Flex Zone
- Silder Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS

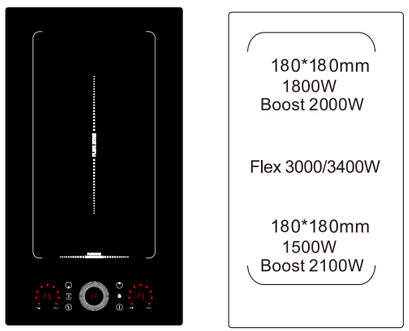


PK-B23511-F1

Features

- 3500W
- Pause
- Flex Zone
- Child Lock
- Slider Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS

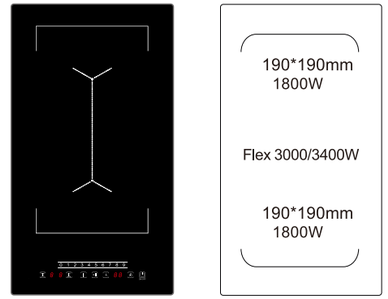


PK-B23508

Features

- 3500W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS

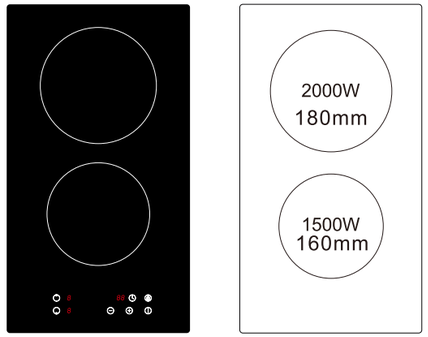


PK-B23515

Features

- 3500W
- Boost
- Touch Control
- 9 Power Levels
- Child Lock
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS

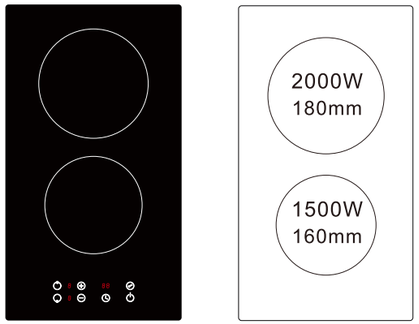


PK-B23510

Features

- 3500W
- Boost
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS

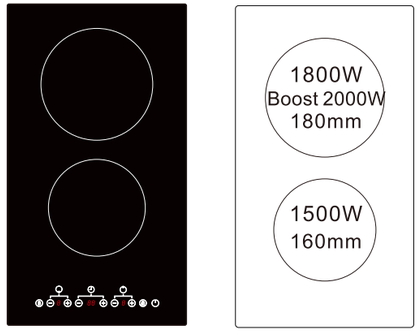

PK-B23527

Features

- 3500W
- Knob Control
- 9 Power Levels
- Overheat Protection
- Automatic safety shut-off

Product Size	Building Demensions	Packing Size	40HQ
290*520*60mm	272*496mm	565*105*370mm	3199PCS



BUILT-IN CERAMIC HOB



Touch Control

99 Minutes Timer

Dual Zones

Child Lock

Various specifications available for coil

165mm



120V/230V/240V
600W/1200W/1200W

200mm




120V/230V/240V
1200W/1800W/1800W

230mm




230V: 1000/2200W
230V: 1000/2300W

230mm



230V: 700/1500/2200W
230V: 800/1500/2300W

230mm



240V: 1000/2200W
240V: 1100/2300W
240V: 1250/2500W

270mm



220-240V : 1200w/2500W

300mm




230V: 1050/1950/2700W

300mm



240V: 1050/1950/2700W
240V: 1150/2150/3000W

165*270mm



230/240V
1100W/2000W

165*270mm



230/240V
1100W/2000W

200*430mm



240V
1600/2300/3900W

PC-J58400-MB

Features


- 8400W
- Dual Zones
- Knob Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D593119-MB

Features


- 9300W
- Pause
- Triple Zone+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D594137-MB

Features


- 9400W
- Triple Zone+Dual Zone
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D591149

Features


- 9100W
- Pause
- Triple Zone+Dual Zone
- Touch Control+Knob Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS

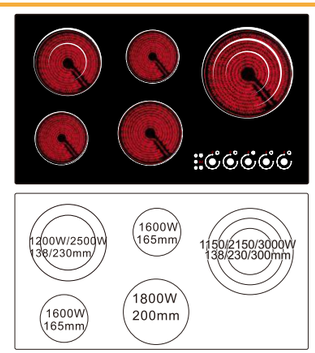

PC-D59254-MB

Features


- 9200W
- Triple Zone
- Slider Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D592138-MB

Features


- 9200W
- Pause
- Triple Zone+Dual Zone
- Touch Control+Knob Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D596139-MB

Features


- 9600W
- Pause
- Triple Zone+Oval Zone
- Magnetic knob
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D592140-MB

Features


- 9200W
- Pause
- Triple Zone
- Slider Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
870*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D585142-MB

Features


- 8500W
- Pause
- Dual Zones
- Knob Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
900*490mm

Packing Size
975*565*125mm

40HQ
1008PCS



PC-D589142-MB

Features


- 8900W
- Pause
- Dual Zones
- Knob Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
900*520*45mm

Building Demensions
900*490mm

Packing Size
975*565*125mm

40HQ
510PCS



PC-D58404

Features


- 8400W
- Pause
- Dual Zone+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
770*520*45mm

Building Demensions
743*490mm

Packing Size
845*585*105mm

40HQ
1188PCS



PC-D58454

Features


- 8400W
- Pause
- Dual Zone+Oval Zone
- Slider Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
770*520*45mm

Building Demensions
730*490mm

Packing Size
845*585*105mm

40HQ
1188PCS



PC-D46703(7752)

Features


- 6700W
- Knob Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection

Product Size
770*520*52mm

Building Demensions
740*490mm

Packing Size
845*585*120mm

40HQ
1188PCS

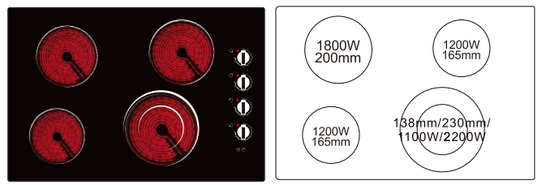

PC-D46604

Features


- 6600W
- Pause
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
770*520*45mm

Building Demensions
740*490mm

Packing Size
845*585*120mm

40HQ
1188PCS





PC-D47001(7752)

Features


- 6000W
- Touch Control
- Triple Zone+Dual Zone
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
770*520*45mm

Building Demensions
730*490mm

Packing Size
845*585*120mm

40HQ
1188PCS





PC-D46645

Features


- 6600W
- Dual Zones+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
590*520*45mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D478119-MB(7752)

Features


- 7800W
- Dual Zones+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
770*520*52mm

Building Demensions
740*490mm

Packing Size
845*585*120mm

40HQ
1188PCS





PC-D46664

Features


- 6600W
- Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
590*520*44mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D466142-MB

Features


- 6600W
- Knob Control
- Oval Zone
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
770*520*52mm

Building Demensions
740*490mm

Packing Size
845*585*120mm

40HQ
1188PCS





PC-D46613

Features


- 6600W
- Dual Zone+Oval Zone
- Slider Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
590*520*45mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D46601

Features


- 6600W
- Dual Zones+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
590*520*45mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D46007

Features


- 6000W
- Pause
- Slider Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
590*520*45mm

Building Dmensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D46001

Features


- 6000W
- Dual Zones
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
590*520*45mm

Building Dmensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D35201

Features


- 5200W
- Dual Zones
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
590*520*45mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D34801

Features


- 4800W
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
450*520*45mm

Building Demensions
425*490mm

Packing Size
515*120*585mm

40HQ
2114PCS





PC-D35007

Features


- 5000W
- Slider Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator


Product Size
450*520*45mm

Building Demensions
425*490mm

Packing Size
515*120*585mm

40HQ
2114PCS





PC-D35501

Features


- 5200W
- Child Lock
- Dual Zone
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
590*520*50mm

Building Demensions
560*490mm

Packing Size
655*120*585mm

40HQ
1799PCS





PC-D36301

Features


- 6300W
- Triple Zone+Oval Zone
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer


Product Size
590*520*44mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D35207

Features


- 5200W
- Child Lock
- Dual Zone
- Slider touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
590*520*45mm

Building Demensions
560*490mm

Packing Size
655*105*575mm

40HQ
1799PCS





PC-D23001

Features


- 3000W
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23058

Features


- 3000W
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D21858-UL

Features


- 1800W
- Pause
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23229

Features


- 3200W
- Dual Zones
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23029

Features


- 3000W
- Child Lock
- Slider Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Individual Residual Heat Indicator


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23034

Features


- 3000W
- Knob Control
- 9 Power Levels
- Overheat Protection


Product Size
290*520*50mm

Building Demensions
270*490mm

Packing Size
590*120*400mm

40HQ
2398PCS





PC-D23048

Features


- 3000W
- Child Lock
- Touch Control
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23001

Features


- 3000W
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23012

Features


- 3000W
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection
- Individual Residual Heat Indicator


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23201

Features


- 3200W
- Dual Zones
- Touch Control
- Child Lock
- 9 Power Levels
- 99 Minutes Timer
- Overheat Protection


Product Size
290*520*45mm

Building Demensions
270*490mm

Packing Size
565*105*370mm

40HQ
3100PCS





PC-D23002

Features

- 3000W
- Knob Control
- 9 Power Levels
- Overheat Protection


Product Size
290*520*50mm

Building Demensions
270*490mm

Packing Size
565*105*400mm

40HQ
2398PCS








Hob With Extractor Hood with behind Lifting



Hob With Downdraft Hood

PXJ-YN77135A-M472108-F2(YB)
PXJ-YN77135A-M472108-F2(YB)

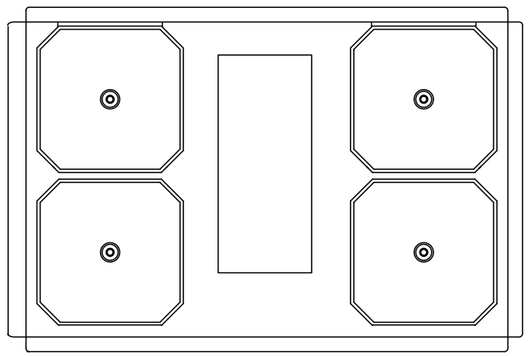

Induction hob:

Total Power:	7200W
4 x Zone individual :	190*190mm/ 1800W boost 2000W
2 x Flex zone:	380*210mm/ 3000W boost 3400W
Timer:	99mins
Level:	0~9 + boost

Control Pane



Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550 m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Lift height:	100mm
Noise level:	68dB
Energy Class:	B

Hob With Extractor Hood with behind Lifting





Back Lifting Hood

Back Lifting suction hood, saving position compared to traditional hoods.



Large draught air suction

Max downdraft power, 180W Variable frequency motor, Air flow: 720-780m3/h, Energy efficiency rating A+++.

Optional linkage

Optional range hood and hob linkage,pressing the button to start the hod will simultaneously start the range hood.

Parameter	PXJ-KEI9018C-M47274-F2

Induction hob:


Total Power:	7200W
4 x Zone individual :	190*190mm 1800W boost 2100W
2 x Flex zone:	380*210mm 3000W boost 3400W
Timer:	99mins
Level:	0~9 + boost

Downdraft hood:

Variable frequency:	DC-180W
Air flow:	720-780m³/h
Level:	0~7 + boost
Static pressure:	550-600Pa
Hood Height:	730mm
Lift height:	320mm
Glass Length:	870mm
S/S part width:	90mm
Energy Class:	A++
Noise Level:	70dB



Outer circulation

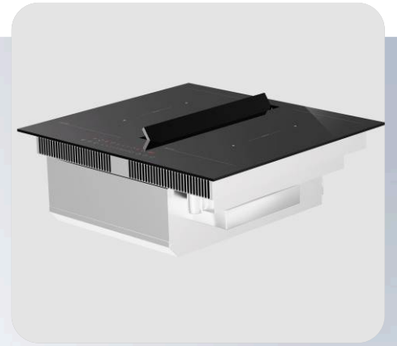

Inner circulation




Ultra-slim design

KEH60 ultra-slim design, induction hob + hood combination height 190mm, favourable to match the oven in one.



Middle Glass cover

KEH60 with middle glass cover more elegant, and optional black metal cover.。



Variable frequency DC motor

Adopt inverter motor, power 145W , static pressure 280-300Pa, more silent.

PXJ-YN77135A-M47274-F1(G3)
PXJ-YW77135A-M47274-F1(G3)


Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*213mm	755*492mm	/*/*/mm	//PCS

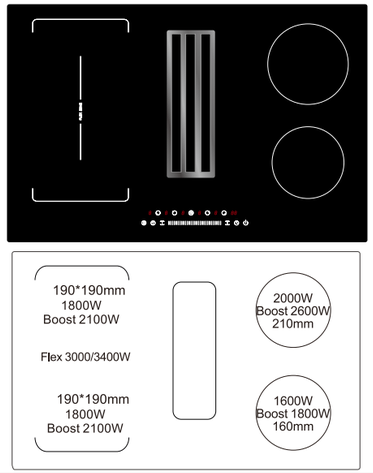

PXJ-YN72135B-M47274-F2
PXJ-YW72135B-M47274-F2


Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*215mm	755*492mm	876*655*341mm	308PCS

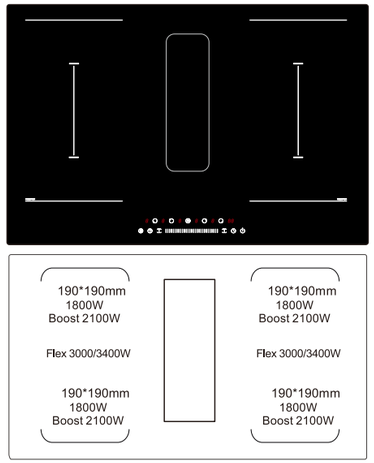

PXJ-YN77135A-M47274-F2(G3)
PXJ-YW77135A-M47274-F2(G3)


Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*213mm	755*492mm	/*/*/mm	//PCS

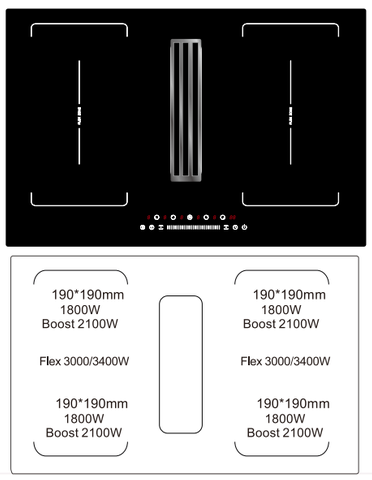

PXJ-YN77135A-M46474-F1(G1)


Features

- 6400W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*215mm	755*490mm	940*340*680mm	287PCS

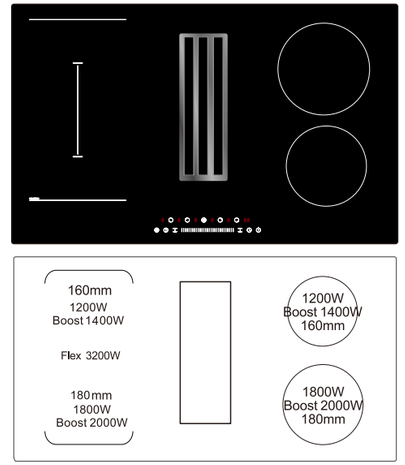

PXJ-YN77135A-M46474-F2(G1)


Features

- 6400W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*215mm	755*490mm	1070*340*680mm	238PCS

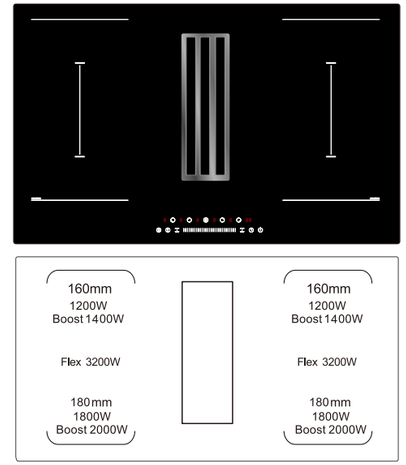

PXJ-YN60135A-M47274-F2(G3)
PXJ-YW60135A-M47274-F2(G3)


Features

- 7200W
- Slider control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
600*520*213mm	420*490mm	/*/*/mm	//PCS

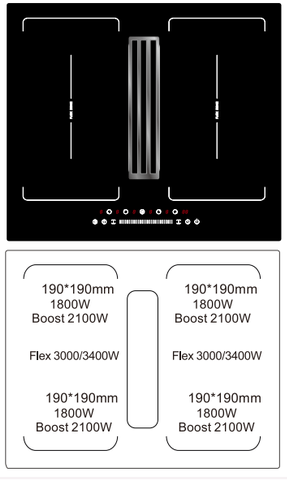

PXJ-YN60135B-M47274-F1(G3)
PXJ-YW60135B-M47274-F1(G3)


Features

- 7200W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
600*520*213mm	575*490mm	/*/*/mm	//PCS



PXJ-YN60135C-M47274-F1(G3)


Features

- 7200W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
600*520*213mm	575*490mm	/*/*/mm	//PCS

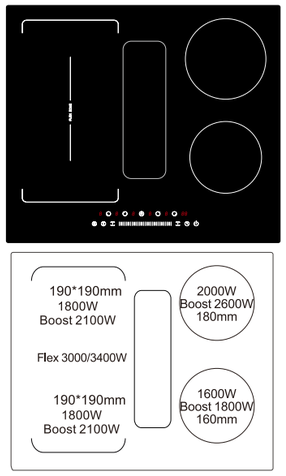

PXJ-YN60135B-M47274-F2
PXJ-YW60135B-M47274-F2


Features

- 7200W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
600*520*215mm	570*490mm	756*655*341mm	378PCS

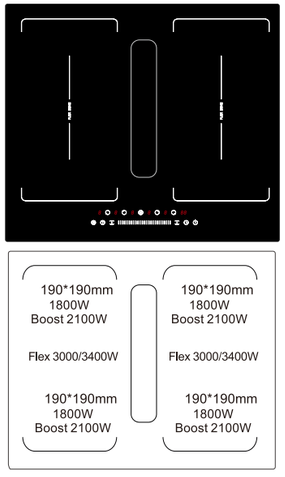

PXJ-YN6015B-M47274-F2-CB
PXJ-YW6015B-M47274-F2-CB


Features

- 7200W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
600*520*200mm	570*490mm	755*346*700mm	329PCS



PXJ-YN45135A-M23574(G3)
PXJ-YW45135A-M23574(G3)


Features

- 3500W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
450*520*213mm	420*490mm	/*/*/mm	//PCS

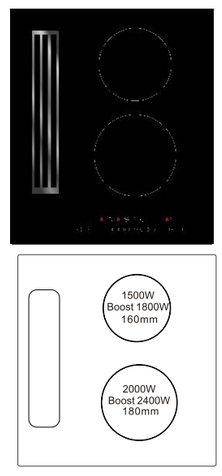

PXJ-KEH73135A-M250124(G1.8)


Features

- 5000W
- 9 Levels Power Setting
- Slider control
- Child lock
- Timer Function
- Booster

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	550m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
730*430*215mm	710*410mm	900*590*340mm	322PCS

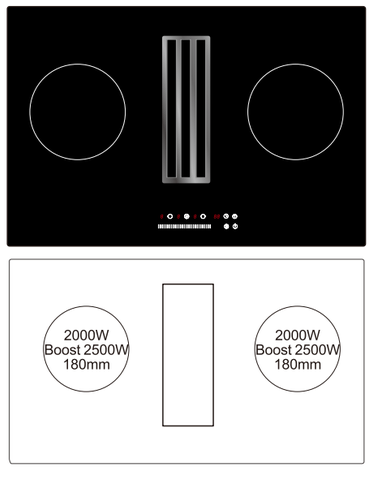

PXJ-YN90135A-D474124-MB


Features


- 7400W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Dual Zones+Oval Zone

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	610m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	75dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
900*520*185m	870*492mm	1000*585*285mm	387PCS

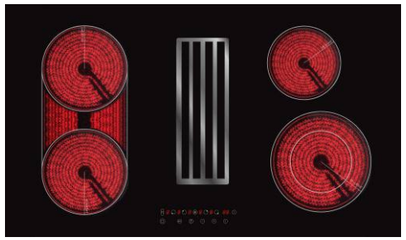

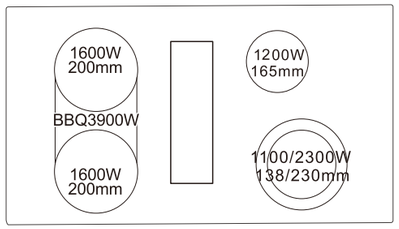

PXJ-YN77135A-D460124
PXJ-YN77135A-D460124

Features


- 6000W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Overheat Protection

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	610m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
770*520*213mm	750*492mm	870*585*285mm	414PCS



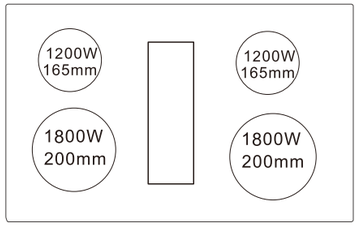

PXJ-YN45135A-D232124


Features


- 3200W
- Touch control
- Timer Function
- 9 Levels Power Setting
- Child lock
- Overheat Protection

Downdraft hood:

Variable frequency:	DC-135W
Air flow:	610m³/h
Level:	0~15 + boost
Static pressure:	550-600Pa
Noise level:	68dB
Energy Class:	B

Product Size	Building Demensions	Packing Size	40HQ
450*520*213mm	750*492mm	??mm	??PCS





Details reflect originality; technology shows quality.

Our special design of the pan support
is more artistic & firmer









Model Code: **PF622ISGB**


Panel	Polished Black Ceramic Glass
Burner	Chinese burner
Pan Support Available	Cast iron
Front (left) zone	Induction zone
Front (left) zone power/Diameter	1600W / 160mm
(Rear) Left zone	Induction zone
(Rear) Left zone power/Diameter	2000W / 180mm
Rear(right) zone	Rapid burner
Rear (right) zone power	3kw
(Front) Right zone	Semi-rapid burner
(Front) Right zone Power	1.75kw
Middle Center zone	-
Zone Power	-
FFD(Flame failure device)	Yes
Power stage setting	9 (Low stage intermittent heating)
Timer	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Total Gas Power	4.75kw
Total Electrical Power	3.6kw
Electrical Voltage	220-240V
Frequency	50/60Hz
Plug	AC›with VDE Plug
Control	Sensor touch+knob
Product Dimensions L*W*H	590*520*100 mm
Packing Dimensions H*W*D	660*565*180 mm
Build-in dimensions W*L	560*490 mm
Loading Qty 20'/40'/40'HQ	400/830/1000



Model Code: **PF6112SGB**

Panel	Polished Black Ceramic Glass
Burner	Ceramics Glass 4mm (Black)
Pan Support Available	Cast iron
Front (left) zone	Induction zone
Front (left) zone power/Diameter	1.8kw / 180mm
(Rear) Left zone	-
(Rear) Left zone power/Diameter	-
Rear(right) zone	Rapid burner
Rear (right) zone power	3kw
(Front) Right zone	-
(Front) Right zone Power	-
Middle Center zone	-
Zone Power	-
FFD(Flame failure device)	Yes
Power stage setting	9
Timer	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Total Gas Power	3kw
Total Electrical Power	3kw
Electrical Voltage	220-240V
Frequency	50/60Hz
Plug	AC›with VDE Plug
Control	Sensor touch+knob
Product Dimensions L*W*H	600*350*100mm
Packing Dimensions H*W*D	655*423*165mm
Build-in dimensions W*L	560*325 mm
Loading Qty 20'/40'/40'HQ	585/1300/1500

ZHL-JA2H4001

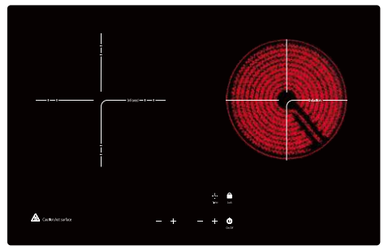


features


- Touch Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Optional:Boost Function
- Child lock
- Mechanical Heating Elements are optional

Total Power[w]

4000W


Screen printing

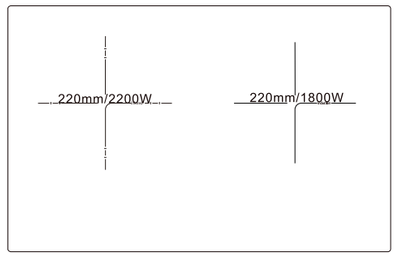



» 630x405mm Hobs

ZHL-M33306-F1

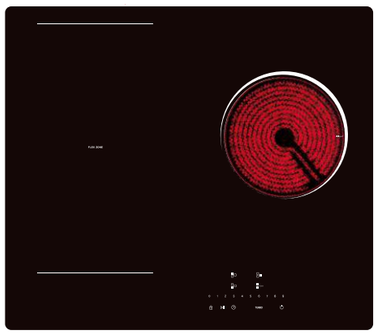


features


- Slider Touch Control
- Timer Function
- 9 Levels Power Setting
- Individual Residual Heat Indicator
- Automatic Safety Switch Off
- Optional:Boost Function
- Child lock
- Mechanical Heating Elements are optiona

Total Power[w]

3300W

Screen printing

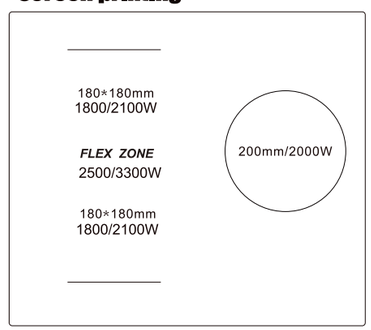



» 520x590mm Hobs

Hybrid Hob



Portable & Built-Induction Hob

Model Code:

PF3011DC1



Product Name	1 zone Induction Hob
Glass size	280*350*4mm
Glass type	Ceramic glass
Control mode	Sensor touch control
Voltage/frequency	220V-240V~50/60Hz
Total power(W)	POWWER 2000W (10A)
Zone Power/Dimension	2000W165mm
Function	
Booster function	/
Power stage setting	9
Timer(min)	Yes
Timer(min) only one or all zones	ALL
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	280*350*68
Built-in Size(mm) (W*D)	/
Carton Size(mm) (W*D*H)	340*415*90
Power cord & plug	VDE plug
Language box	EN
Carton	Brown box
Body	Plastic
Loading Qty 20'/40'/40'HQ	2507/5152/5824

Model Code:

PF3011DC4



Product Name	1 zoned Induction Hob
Glass size	280*350*4mm
Glass type	Unpolished ceramic glass
Control mode	Sensor touch control
Voltage/frequency	220-240AC 50/60Hz
Total power(W)	1500W/ d=150mm
Zone Power/Dimension	1500W
Function	
Booster function	/
Power stage setting	8
Timer(min)	Yes
Timer(min) only one or all zones	ALL
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	350*280*67mm
Built-in Size(mm) (W*D)	/
Carton Size(mm) (W*D*H)	315*390*90mm
Power cord & plug	2*1.0*1.5m with VDE plug
Language box	EN
Carton	Brown box
Body	Plastic
Loading Qty 20'/40'/40'HQ	2400/4900/5680

Model Code:


PF3013DC3-WHI



Product Name	1 zoned Induction Hob
Glass size	d=245mm
Glass type	Unpolished Ceramic glass (White)
Control mode	Knob control
Voltage/frequency	220V-240V~50Hz
Total power(W)	Actual POWWER 1900W
Zone Power/Dimension	2200W/150mm (Actual 1900W)
Function	
Booster function	/
Power stage setting	9
Timer(min)	99mins
Timer(min) only one or all zones	Yes
Auto switch off safety	Yes
Child lock	/
Residual heat indicator	/
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	265*75mm
Built-in Size(mm) (W*D)	/
Carton Size(mm) (W*D*H)	312*355*117mm
Power cord & plug	VDE plug
Language box	EN
Carton	Brown box
Body	Plastic (White)
Loading Qty 20'/40'/40'HQ	2242/4674/5412

Model Code:

PF3016DC1 TFT



Product Name	1 zoned Induction Hob
Glass size	290*305x3.6mm
Glass type	Black Ceramic glass (Polished)
Control mode	Knob+Sensor Touch
Voltage/frequency	220-240AC 50Hz
Total power(W)	2100W (150mm)
Zone Power/Dimension	200W (Low noise heating)
Function	
Booster function	/
Power stage setting	9
Timer(min)	99mins
Timer(min) only one or all zones	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	290*370*30mm
Built-in Size(mm) (W*D)	/
Carton Size(mm) (W*D*H)	370*518*81mm
Power cord & plug	2*1.0mm², 1.5m with plug
Language box	EN
Carton	Brown box
Body	Plastic
Loading Qty 20'/40'/40'HQ	1768/3692/4118

Model Code:

PF7023DC1 ►



Product Name	2 zones Induction Hob
Glass size	730*430mm
Glass type	Polished Ceramic Glass
Heater type	Aluminum coils
Control mode	Sensor touch control
Voltage/frequency	AC220-240~ 50/60Hz
Total power(W)	5000W (No shared power)
Front (left) zone Power/Dimension	2000W boost 2500W /180mm
Rear (left) zone Power/Dimension	-
Rear (right) zone Power/Dimension	2000W boost 2500W /180mm
Front (right) zone Power/Dimension	-
Function	
Booster function	Yes
Power stage setting	8
Timer(min)	Yes
Timer(min) only one or all zones	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	730*430*68
Built-in Size(mm) (W*D)	685*395
Carton Size(mm) (W*D*H)	830*510*130
Product Net weight(kg)	6.96
Gross weight(kg)	7.8
Power cord & plug	3x2.5x1.2m Power cable without plug
Language box	EN
Carton	Brown box
Body	Metal
Loading Qty 20'/40'/40'HQRemark	493/1020/1140

Model Code:

PF7025DC1P ►



Product Name	2 zones Induction Hob
Glass size	730*430mm
Glass type	Polished Ceramic Glass
Heater type	Aluminum coils
Control mode	Sensor touch contro
Voltage/frequency	AC220-240~ 50/60Hz
Total power(W)	Shared power 3500W
Front (left) zone Power/Dimension	2000W /160mm
Rear (left) zone Power/Dimension	-
Rear (right) zone Power/Dimension	2000W /160mm
Front (right) zone Power/Dimension	-
Function	
Booster function	-
Power stage setting	9
Timer(min)	Yes
Timer(min) only one or all zones	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	730*430*68
Built-in Size(mm) (W*D)	685*395
Carton Size(mm) (W*D*H)	830*510*130
Product Net weight(kg)	6.16
Gross weight(kg)	7.4
Power cord & plug	3x1.5x1.2m Power cable with plug
Language box	EN
Carton	Brown box
Body	Metal
Loading Qty 20'/40'/40'HQRemark	493/1020/1140

Model Code:

◄ PF7024DC1P



Product Name	2 zones Induction Hob
Glass size	730*430mm
Glass type	Polished Ceramic Glass
Heater type	Aluminum coils
Control mode	Slide sensor touch
Voltage/frequency	AC220-240~ 50/60Hz
Total power(W)	Shared power 4000W
Front (left) zone Power/Dimension	2000W boost 2500W /180mm
Rear (left) zone Power/Dimension	-
Rear (right) zone Power/Dimension	2000W boost 2500W /180mm
Front (right) zone Power/Dimension	-
Function	
Booster function	Yes
Power stage setting	9
Timer(min)	Yes
Timer(min) only one or all zones	Yes
Auto switch off safety	Yes
Child lock	Yes
Residual heat indicator	Yes
Pan Sensor	Yes
Dimensions & Package & Delivery	
Product Size(mm) (W*D*H)	730*430*68
Built-in Size(mm) (W*D)	685*395
Carton Size(mm) (W*D*H)	830*510*130
Product Net weight(kg)	6.96
Gross weight(kg)	7.8
Power cord & plug	3x2.5x1.2m Power cable with plug
Language box	EN
Carton	Brown box
Body	Metal
Loading Qty 20'/40'/40'HQRemark	493/1020/1140





Model Code:

PF320SGB-2

Burner Type	Chinese burner
Panel	Tempered Glass (Black)
Pan Support Available	Cast Iron
Front (left) zone	Semirapid
Front (left) zone Power(KW)	1.75
(Rear) Left zone	-
(Rear) Left zone Power(KW)	-
Rear(right) zone	rapid burner
Rear (right) zone Power(KW)	3.0
(Front) Right zone	-
(Front) Right zone Power(KW)	-
Middle Center zone	-
Zone Power(KW)	-
FFD(Flame failure device)	FFD
Nominal Power(KW)	4.75
Electrical Voltage V	220-240
Frequency Hz	50/60
plug	Yes
knob	Bakelite
Product Dimensions L*W*H mm	520*300*100
Packing Dimensions H*W*D mm	350*560*140
Build-in dimensions W*L mm	285*485
Loading Qty 20'/40'/40'HQ	780/1664/1920



Model Code:

PF640STGB-2

Burner Type	Chinese burner
Panel	Glass (Black)
Pan Support Available	Cast Iron
Front (left) zone	wok burner
Front (left) zone Power(KW)	3.3
(Rear) Left zone	Semirapid
(Rear) Left zone Power(KW)	1.75
Rear(right) zone	Semirapid
Rear (right) zone Power(KW)	1.75
(Front) Right zone	Auxiliary
(Front) Right zone Power(KW)	1.0
Middle Center zone	-
Zone Power(KW)	-
FFD(Flame failure device)	FFD
Nominal Power(KW)	7.8
Electrical Voltage V	220-240
Frequency Hz	50/60
plug	Yes
knob	Bakelite
Product Dimensions L*W*H mm	600*520*100
Packing Dimensions H*W*D mm	640*560*140
Build-in dimensions W*L mm	560*480
Loading Qty 20'/40'/40'HQ	442/ 923/1080



Model Code:

PF320SGB-2

Burner Type	Chinese burner
Panel	Stainless steel (Inox)
Pan Support Available	Cast Iron
Front (left) zone	wok burner
Front (left) zone Power(KW)	3.3
(Rear) Left zone	Semirapid
(Rear) Left zone Power(KW)	1.75
Rear(right) zone	Semirapid
Rear (right) zone Power(KW)	1.75
(Front) Right zone	Auxiliary
(Front) Right zone Power(KW)	1.0
Middle Center zone	-
Zone Power(KW)	-
FFD(Flame failure device)	FFD
Nominal Power(KW)	7.8
Electrical Voltage V	220-240
Frequency Hz	50/60
plug	Yes
knob	Bakelite
Product Dimensions L*W*H mm	585*505*95
Packing Dimensions H*W*D mm	630*550*135
Build-in dimensions W*L mm	560*480
Loading Qty 20'/40'/40'HQ	442/ 923/1080




Model Code:

PF950STGB-1

Burner Type	Chinese burner
Panel	Tempered Glass (Black)
Pan Support Available	Cast Iron
Front (left) zone	Semirapid
Front (left) zone Power(KW)	1.75
(Rear) Left zone	Rapid burner
(Rear) Left zone Power(KW)	3.0
Rear(right) zone	Semirapid
Rear (right) zone Power(KW)	1.75
(Front) Right zone	Auxiliary
(Front) Right zone Power(KW)	1.0
Middle Center zone	wok burner
Zone Power(KW)	3.3
FFD(Flame failure device)	FFD
Nominal Power(KW)	10.8
Electrical Voltage V	220-240
Frequency Hz	50/60
plug	Yes
knob	Bakelite
Product Dimensions L*W*H mm	900*520*100
Packing Dimensions H*W*D mm	940*560*140
Build-in dimensions W*L mm	840*480
Loading Qty 20'/40'/40'HQ	252/528/615



TFT Touch Control Built-in Electric Oven

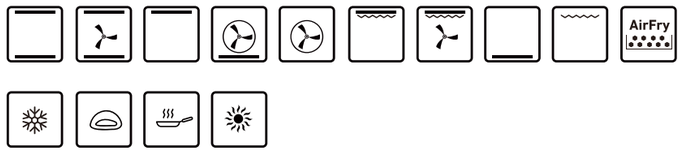



F37510B00



F37510W00



F37510S01



F37510S02

Control Panel



Specification

- 75L capacity
- 6 layer racks
- 3-layer glass
- Metal handle OVLS01
- Touch screen
- Safety Child Lock
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- Energy Efficiency Rate A
- Max power:3000W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz

Functions

- Normal 10 Functions
- Auxiliary menu:Defrost, FermentationReheat,Dry
- Personal Menu: Customize according to customer needs
- Settings:Language setting, Time setting,
- Alarm setting, Screen brightness setting, Restore settings

Package

- Product Size: W595*D575*H595mm
- Pakaging Size: W640*D675*H662mm
- N.W.: 28Kg, G.W.: 31Kg
- Loading: 216PCS/40HQ

Optional Designs



VINTAGE-STYLE OVEN



N16504B00



Specification

- 65L capacity
- 6 layer racks
- 2-layer glass easy-removable door
- Metal handle OVLS01
- Easy Cleaning
- 1 pc baking tray, 1 pc baking rack
- 4 functions:Lamp,Top outer heating+Bottom heating, Top outer heating+Top inner heating,Bottom Heating
- Energy Efficiency Rate A
- Max power:2200W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 24.5Kg, G.W.: 29Kg
- Loading: 302 PCS/40HQ

D16009S02



Specification

- 60L capacity
- Digital timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 9 functions: Lamp, Fan, Topinner heating+Top Outer heating+Fan, Top inner heating+Top outer heating, Bottom heating+Back heating+Fan, Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating, Bottom heating, Back heating+Fan
- Energy Efficiency Rate A
- Max power:2800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 25.5Kg, G.W.: 30Kg
- Loading: 302 PCS/40HQ

M16006S01



Specification

- 60L capacity
- Mechanical timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 6 functions:Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating,Bottom heating, Bottom heating+Fan,Top outer heating+Top inner heating,Top inner heating
- Energy Efficiency Rate A
- Max power:2200W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 25Kg, G.W.: 29.5Kg
- Loading: 302 PCS/40HQ

T16010W00



Specification

- 60L capacity
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Touch screen
- Child Lock
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 10 functions: Fan, Top Outer heating+Bottom heating, Top Outer heating+Bottom heating+Fan, Top Outer heating, Back heating+Bottom heating+Fan, Back heating+Fan, Top outer heating+Top Inner heating, Top outer heating+Top Inner heating+Fan, Bottom heating, Back heating+Top Outer heating+Fan
- Energy Efficiency Rate A
- Max power:2800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 25Kg, G.W.: 30Kg
- Loading: 302 PCS/40HQ

N38104B00



Specification

- 81L capacity
- 6 layer racks
- 2-layer glass easy-removable door
- Metal handle OVLS01
- Easy Cleaning
- 1 pc baking tray, 1 pc baking rack
- 4 functions:Lamp,Top outer heating+Bottom heating, Top outer heating+Top inner heating,Bottom Heating
- Energy Efficiency Rate A
- Max power:2200W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W595*D575*H595mm
- Pakaging Size: W625*D675*H662mm
- N.W.: 24.5Kg, G.W.: 29Kg
- Loading: 216PCS/40HQ

D37509S01



Specification

- 75L capacity
- Digital timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 9 functions: Lamp, Fan, Top inner heating+Top Outer heating+Fan, Top inner heating+Top outer heating, Bottom heating+Back heating+Fan, Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heatingBottom heating, Back heating+Fan
- Energy Efficiency Rate A
- Max power:2800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W595*D575*H595mm
- Pakaging Size: W625*D675*H662mm
- N.W.: 25.5Kg, G.W.: 30Kg
- Loading: 216PCS/40HQ

M37506W00



Specification

- 75L capacity
- Mechanical timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 6 functions:Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating,Bottom heating, Bottom heating+Fan,Top outer heating+Top inner heating, Top inner heating
- Energy Efficiency Rate A
- Max power:2200W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W595*D575*H595mm
- Pakaging Size: W625*D675*H662mm
- N.W.: 25Kg, G.W.: 29.5Kg
- Loading: 216PCS/40HQ

T37510S02



Specification

- 75L capacity
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Touch screen
- Child Lock
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 10 functions: Fan, Top Outer heating+Bottom heating, Top Outer heating+Bottom heating+Fan, Top Outer heating, Back heating+Bottom heating+Fan, Back heating+Fan, Top outer heating+Top Inner heating, Top outer heating+Top Inner heating+Fan, Bottom heating, Back heating+Top Outer heating+Fan
- Energy Efficiency Rate A
- Max power:2800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W595*D575*H595mm
- Pakaging Size: W625*D675*H662mm
- N.W.: 28Kg, G.W.: 31Kg
- Loading: 216PCS/40HQ

N26204B00



Specification

- 62L capacity
- 6 layer racks
- 2-layer glass easy-removable door
- Metal handle OVLS01
- Easy Cleaning
- 1 pc baking tray, 1 pc baking rack
- 4 functions:Lamp,Top outer heating+Bottom heating, Top outer heating+Top inner heating,Bottom Heating
- Energy Efficiency Rate A
- Max power:1800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W445*D565*H595mm
- Pakaging Size: W475*D662*H662mm
- N.W.: 21Kg, G.W.: 24Kg
- Loading: 328 PCS/40HQ

M25806S01



Specification

- 58L capacity
- Mechanical timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 6 functions:Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating,Bottom heating, Bottom heating+Fan,Top outer heating+Top inner heating, Top inner heating
- Energy Efficiency Rate A
- Max power:1800W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W445*D565*H595mm
- Pakaging Size: W475*D662*H662mm
- N.W.: 23Kg, G.W.: 26Kg
- Loading: 328PCS/40HQ

D25809S01



Specification

- 58L capacity
- Digital timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 9 functions: Lamp,Fan,Top inner heating+Top Outer heating+Fan,Top inner heating+Top outer heating, Bottom heating+Back heating+Fan, Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating, Bottom heating,Back heating+Fan
- Energy Efficiency Rate A
- Max power:2550W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package


- Product Size: W445*D565*H595mm
- Pakaging Size: W475*D662*H662mm
- N.W.: 23Kg, G.W.: 26Kg
- Loading: 328PCS/40HQ

T25810W00



Specification

- 58L capacity
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Touch screen
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 10 functions: Fan, Top Outer heating+Bottom heating, Top Outer heating+Bottom heating+Fan, Top Outer heating, Back heating+Bottom heating+Fan, Back heating+Fan, Top outer heating+Top Inner heating, Top outer heating +Top Inner heating+Fan, Bottom heating, Back heating +Top Outer heating+Fan
- Energy Efficiency Rate A
- Max power:2550W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W445*D565*H595mm
- Pakaging Size: W475*D662*H662mm
- N.W.: 23Kg, G.W.: 26Kg
- Loading: 328PCS/40HQ

N16504DB00-M470118




Specification

- 65L capacity
- 6 layer racks
- 2-layer glass easy-removable door
- Easy Cleaning
- 1 pc baking tray, 1 pc baking rack
- 4 functions:Lamp,Top single outer heating+Bottom heating, Top single outer heating, Bottom heating
- Energy Efficiency Rate A
- Max power:2000W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Oven Package

- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 24Kg, G.W.: 28.5Kg



Specification

- Product Name: 60cm Induction Hob
- Installation: Built-in
- Voltage/frequency: 220-240V ,50/60Hz
- Total power(W): 7000
- Front left zone(W)/size: 180mm/2000W
- Rear left zone(W)/size: 160mm/1500W
- Rear right zone(W)/size: 180mm/2000W
- Front right zone(W)/size: 160mm/1500W
- Glass: Chinese Glass
- Loading: 240sets/40HQ

Hob Package


- Product Size: W590*D520*H44mm
- Packing Size: W655*D580*H120mm
- N.W: 7.5kg G.W: 8.4kg

N16006S01-D466130




Specification

- 60L capacity
- Mechanical timer
- 6 layer racks
- 2-layer glass
- Metal handle OVLS01
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 6 functions:Top outer heating+Bottom heating+Fan, Top outer heating+Bottom heating,Bottom heating, Bottom heating+Fan,Top outer heating+Top inner heating, Top inner heating
- Energy Efficiency Rate A
- Max power:2200W
- 1.2m power cord with plug
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Oven Package

- Product Size: W595*D475*H595mm
- Pakaging Size: W625*D570*H662mm
- N.W.: 25Kg, G.W.: 29.5Kg



Specification

- Product Name: 60cm Ceramic Hob
- Installation: Built-in
- Voltage/frequency: 220-240V ,50/60Hz
- Total power(W): 6600
- Front left zone(W)/size: 1200W/165mm
- Rear left zone(W)/size: 1000/2000W, 165/270mm
- Rear right zone(W)/size: 1200W/165mm
- Front right zone(W)/size: 1100/2200W, 138/230mm
- Glass: Chinese Glass
- Loading: 240sets/40HQ

Hob Package

- Product Size: W590*D520*H44mm
- Packing Size: W655*D580*H120mm
- N.W: 7.5kg G.W: 8.4kg

20ANE04PC460




Specification

- 65L capacity
- 6 layer racks
- 2-layer glass easy-removable door
- Easy Cleaning
- 1 pc baking tray, 1 pc baking rack
- 4 functions:Lamp,Top outer heating+Bottom heating, Top outer heating,Top inner heating
- Energy Efficiency Rate A
- Max power:2000W
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz

Package

- Product Size: W500*D595*H820mm
- Pakaging Size: W550*D715*H940mm
- N.W.: 31Kg, G.W.: 35Kg
- Loading: 190set/40HQ



Specification

- Type:Ceramic hob
- Voltage/frequency: 220-240V ,50/60Hz
- Total power(W): 6000
- Front left zone(W)/size: 1800W/200mm
- Rear left zone(W)/size: 1200W/165mm
- Rear right zone(W)/size: 1800W/200mm
- Front right zone(W)/size: 1200W/165mm
- Glass: Chinese Glass

20ADE09PC460




Specification

- 60L capacity
- Digital timer
- 6 layer racks
- 2-layer glass
- Easy Cleaning
- Removable door plate
- 1 pc baking tray, 1 pc baking rack
- 9 functions: Lamp,Fan,Top inner heating+Top Outer heating+Fan, Top inner heating+Top outer heating, Bottom heating+Back heating+Fan, Top outer heating+Bottom heating+Fan, Top outer heating +Bottom heating, Bottom heating,Back heating+Fan
- Energy Efficiency Rate A
- Max power:2800W
- Temperature range: 50℃~250℃
- Voltage/Frequency: 220~240V,50/60Hz



Package

- Product Size: W500*D595*H820mm
- Pakaging Size: W550*D715*H940mm
- N.W.: 32Kg, G.W.: 36Kg
- Loading: 190set/40HQ



Specification


- Type: Induction Hob
- Voltage/frequency:220-240V, 50/60Hz
- Total power(W):7000
- Front left zone(W)/size:160mm/1500W
- Rear left zone(W)/size:180mm/2000W
- Rear right zone(W)/size:160mm/1500W
- Front right zone(W)/size:180mm/2000W
- Glass: Chinese Glass

New
Cooker Hood



MIC01 Specification


Material	Black Sprayed
Switch	Piano control
Filter	Aluminum Grease Filters-Black
Lighting	2x1.5W LED Lamp
Extraction Power	400m³/h
Motor Type	1x130W AC motor
Air Outlet	150mm
Loading Quantity (20/40/HQ)	120/250/270cm

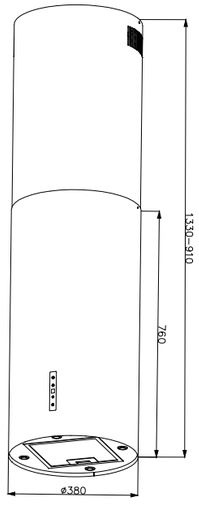



MT03 Specification


Material	Black Sprayed + Tempered Glass
Switch	Touch control
Filter	Black steel mesh
Lighting	1x3W LED Lamp
Extraction Power	1200m³/h
Motor Type	1x280W
Chimney Extension	500mm
Air Outlet	150mm
Loading Quantity (20/40/HQ)	75/160/180mm

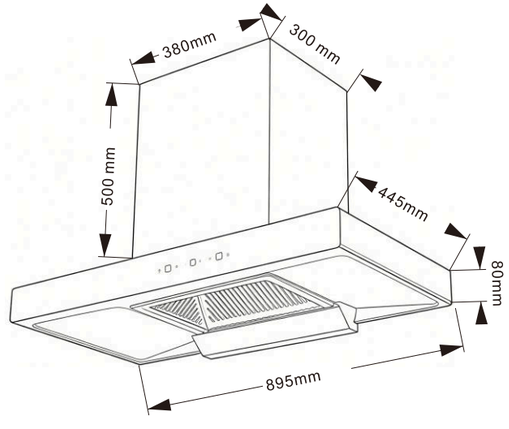



MT01 Specification


Material:	Inox Aisi 430 Black Tempered Glass
Switch:	Touch control
Filter:	3 speeds 2 pcs Aluminum Filters(60/70cm) 3 pcs Aluminum Filters(90cm)
Lighting:	2x1.5W LED LamP
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	233/477/550(60cm) 158/318/370(90cm)






MT03 Specification

Material:	Inox Aisi 430 Black Tempered Glass
Switch:	Tcuch control
Filter:	3 Speeds 2 pes Aluminum Filters(60/70cm) 3 pes Aluminum Filters(90cm)
Lighting:	2x1.5W LED Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	229/474/550(60cm) 156/320/368(90cm)



MT05 Specification


Material:	Inox Aisi 430
Switch:	Push Button
Filter:	3 Speeds 2 pcs Aluminum Filters(60cm) 3 pcs Aluminum Filters(90cm)
Lighting:	2x2WLED tamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	500+500mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	156/318/352(60cm) 108/206/240(90cm)





MT06 Specification


Material:	Inox Aisi 304
Switch:	Push Button
Filter:	3 Speeds 8 pcs Baffle Filters
Lighting:	6x2W LED Lamp
Extraction Power:	2x1000m3/h
Motor Type:	2x320W
Chimney Extension:	600+600mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	40/86/129



MT09 Specification




Material:	Inox Aisi 430 Top Black Tempered Glass
Switch:	Electronic Switch
Filter:	3 Speeds 2 pcs Aluminum Filters(60/70cm) 3 pcs Aluminum Filters(90cm)
Lighting:	2x1.5W LED Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	229/474/550(60cm) 156/320/368(90cm)



MT10 Specification




Material:	Inox Aisi 430 Black Tempered Glass
Switch:	Touch control
Filter:	3 Speeds 2 pcs Aluminum Filters(60/70cm) 3 pcs Aluminum Filters(90cm)
Lighting:	LED Strip
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	500+500mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	215/443/507(60cm) 144/296/344(90cm)



MT12 Specification




Material:	Inox Aisi 430 Black Tempered Glass
Switch:	Touch control
Filter:	3 Speeds SS Oval filter Filters
Lighting:	LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	450+450mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	120/256/320(90cm)



MT14 Specification




Material:	Inox Aisi 430
Switch:	Touch control
Filter:	3 speeds 2 pcs Aluminum Filters(60/70cm) 3 pcs Aluminum Filters(90cm)
Lighting:	LED Strip
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	300mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	215/443/507(60cm) 144/296/344(90cm)

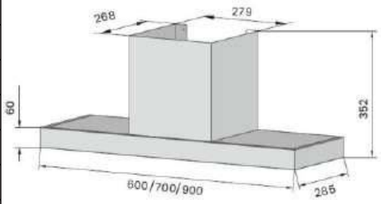



MS01 Specification


Material:	White Paint Body Thickness:100mm
Switch:	Push Button
Filter:	3 Speeds 2x5 Layer Aluminum Filter(60/70cm) 3x5 Layer Aluminum Filter(90cm)
Lighting:	1x2W LED Lamp
Extraction Power:	250m3/h
Motor Type:	1x75W
Chimney Extension:	120mm
Air Outlet:	551/1152/1298(60cm)
Loading ary(20/40/HQ)	448/930/1042(75cm) 391/748/880(90cm)





MS02 Specification


Material:	White Paint Body Thickness:100mm
Switch:	Push Button
Filter:	3 Speeds 2x5 Layer Aluminum Filter(60/70cm) 3x5Layer Aluminum Filter(90cm)
Lighting:	1x2W LED Lamp
Extraction Power:	250m3/h
Motor Type:	1x75W
Chimney Extension:	120mm
Air Outlet:	551/152/1296(60cm)
Loading ary(20/40/HQ)	448/930/1042(75cm) 319/748/880(90cm)





MS03 Specification


Material:	White Paint Body Thickness:80mm
Switch:	Push Button
Filter:	3 speeds 2x3 Layer Aluminum Filter(60/70cm) 3x3 Layer Aluminum Filter(90cm)
Lighting:	1x40W Normal Lamp
Extraction Power:	220m3/h
Motor Type:	1x100W
Chimney Extension:	120mm
Air Outlet:	730/1400/1655(60cm)
Loading ary(20/40/HQ)	463/953/1100(90cm)





MS06 Specification


Material:	white Paint Body Thickness:85mm
Switch:	Push Button
Filter:	3 speeds Metal Filter+Acrylic Mat Filter
Lighting:	1x2W LED Lamp
Extraction Power:	220m3/h
Motor Type:	1x80W
Chimney Extension:	120mm
Air Outlet:	768/572/1762(60cm)
Loading ary(20/40/HQ)	520/1052/1185(90cm)





MS07 Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	Baffle filter
Airflow	
Housing B8 .400CFM	
Optional	
Touch switch , Electronic svitch	
Size	
30"	
Loading(20'GP /40'HQ)	
252/560 pcs	





MS08 Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	3-Speed touch switch
Lighting	2x1.5W LED
Filter	Baffle filter
Airflow	
Housing B8 .400CFM	
Optional	
Touch switch , Electronic svitch	
Size	
30"	
Loading(20'GP /40'HQ)	
252/560 pcs	





MS13 Specification

Features	
Material	Inox 430 Ss body/ cold rolled plate
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	5-Layer aluminum grease filter
Airflow	
Housing A4 (1x150W)-294CFMM	
Optional	
Touch switch / Electronic switch Baffle filter Aluminum exhaust pipe Available powder coating: Black / white / Gray	
Size	
30"/36"	
Loading(20'GP / 40'HQ)	
270/740 pcs(36) 315/860 pcs(30")	








MA01-30 Specification


Material:	Inox AIsI 430
Switch:	Push Button
Filter:	3 Speeds 2 pcs Aluminum Filters(50/60/70cm) 3 pcs Aluminum Filters(90/100cm)
Lighting:	2x40w Normal Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	248/516/583(60cm) 168/344/392(90cm) 156/328/372(100cm





MA01-30A Specification


Material:	Metal cream coating
Switch:	Push Button
Filter:	3 Speeds 2 pcs Aluminum Filers(60/7Ccm) 3 pcs Aluminym Filters(90cm)
Lighting:	2x40W Normal Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	247/431/503(60cm) 147/300/340($0cm)





MA04 Specification


Material:	Inox Aisi 430
Switch:	Touch control
Filter:	3 Speeds 2 pcs Aluminum Filter(75cm) 3 pcs Aluminum Filters(90cm)
Lighting:	1x8W LED Panel
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	168/344/392(90cm)





MI01 Specification


Material:	Inox AIsI 430 Tempered Glass
Switch:	Push Button 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	4x2W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	600+600mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	72/150/184(90cm)





MI02 Specification


Material:	Inox AIsI 430
Switch:	Push Button
Filter:	3 Speeds
Lighting:	3 pcs Aluminum Filters
Extraction Power:	4x2W LED Lamp
Motor Type:	750m3/h
Chimney Extension:	1x210W
Air Outlet:	600+600mm
Loading ary(20/40/HQ)	150mm72/150/184(90cm)





MI04 Specification


FInIsh	Material: Inox AIsI 430 &Tempered Glass
Measurement	600/900MM
Features	LED 2x1.5W 3 Speeds Electronic Button 1x3 layers Washable Alumin um Grease Filter
Performance	Air flow: 700m³/h
Optlonal	·Kinds of Button Design ·Air Flow Range 500/1000m³/h
Loadlng(20/40/HQ)	72/144/192(600/900mm)





MI05 Specification


Finish	Material: Inox Aisi 430 &Tempered Glass
Measurement	600/900MM
Features	LED 3x1.5W 3 Speeds Electronic Button 1x3 layers Washable Alumin um Grease Filter
Performance	Air flow: 700m³/h
Optional	·Kinds of Button Design ·Air Flow Range 500/1000m³/h
Loading(20/40/HQ)	100/205/214(900mm)





MB06 Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	3-Speed electronic switch
Lighting	2x1.25W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
Size	
520/720mm	
Loading(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MB01 Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	3-Speed push button
Lighting	2x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
Size	
600mm	
Loading(20'GP / 40'HQ)	
356/868 pcs(600mm)	





MB07 Specification


Features	
Material	Metal and glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	1x6W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
Size	
600mm	
Loading(20'GP / 40'HQ)	
372/868 pcs(600mm)	





MB09 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	1x6W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
Size	
520/600/720mm	
Loading(20'GP / 40'HQ)	
306/714 pcs(720mm) 372/868 pcs(600mm) 402/938 pcs(520mm)	





MB12 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Push button	
Size	
520/720mm	
Loading(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MB14 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Push button	
Size	
520/720mm	
Loading(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MB15 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	2x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Push button	
Size	
520/720mm	
Loading(20'GP / 40'HQ)	
459/1020 pcs(720mm) 603/1340 pcs(520mm)	





MB16 Specification


Features	
Material	Inox 430 Ss body/ Cold rolled plate
Switch	3-Speed push button
Lighting	2x1.5W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipeTouch switch/Electronic switch	
Size	
520/720mm	
Loading(20'GP / 40'HQ)	
357/840 pcs(720mm) 476/1120 pcs(520mm)	





MB20 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
Lighting	1x5W/1x6W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousIngK(1x230W)-750m3h Housing P1 (1x130W)-500m3h HousIng s(1x65W)-350m3/h	
Optional	
AlumInum exhaust pIpe	
Size	
520/720mm	
LoadIng(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MB21 Specification


Features	
Material	Glass panel + Zinc body
Switch	3-Speed touch switch
LIghtIng	1x5W/1x6W LED
Filter	3-layer aluminum grease filter
AIrflow	
HousIngK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
SIze	
520/720mm	
Loading(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MF01-A Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
Housing A2(1x80W)-200m3/h	
Optional	
AlumInum exhaust ppe Avallable powder coatIng: Black/WhIte/ Gray	
Size	
LoadIng(20'GP / 40'HQ)	
594/1368 pcs(600mm)	





MF02-A Specification


Features	
Material	Metal and glass panel + Zinc body
Switch	3-Speed touch switch
LIghtIng	1x3W LED
Filter	3-Layer aluminum grease filter
AIrflow	
HousIngK(1x230W)-750m3h Housing P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
Aluminum exhaust pipe	
SIze	
600mm	
Loading(20'GP / 40'HQ)	
378/882 pcs	





MF01 Specification


Features	
Material	Inox 430 ss body/ Cold rolled plate
Switch	2-Speed rocker switch
Lighting	1x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
Housing A2 (1x80W)-200m3h	
Optional	
Round charcoal filter 2x1.5W LEDAluminum exhaust pipe	
Size	
500/600/700/800/900mm	
Loading(20'GP / 40'HQ)	
410/854 pcs(900mm)438/952 pcs(800mm) 525/1092 pcs(700mm)594/1368 pcs(600mm) 600/1470 pcs(500mm)	





MF04 Specification


Features	
Material	Inox 430 ss body/ cold rolled plate
Switch	2-Speed rocker switch
LIghtIng	1x2W LED
Filter	3-Layer aluminum grease filter
Airflow	
Housing B1(1x65W)-350m3h	
Optional	
2xRound charcoal filter 2x1.5W LED Touch switch / Electronic switch AlumInum exhaust pIpe	
Size	
500/600/700/800/900mm	
Loading(20'GP / 40'HQ)	
330/785 pcs(900mm)370/906 pcs(800mm) 430/1003 pcs(700mm)500/1100 pcs(600mm) 640/1350 pcs(500mm)	





MB22 Specification


Features	
Material	Cold rolled plate + Zinc body
Switch	3-Speed electronic switch
Lighting	2x1.25W LED
Filter	3-Layer aluminum grease filter
Airflow	
HousingK(1x230W)-750m3h Housing P1 (1x130W)-500m3h HousIng s(1x65W)-350m3/h	
Optional	
Touch swItch	
Size	
520/720mm	
LoadIng(20'GP / 40'HQ)	
306/714 pcs(720mm) 402/938 pcs(520mm)	





MB27 Specification


Features	
Material	Inox 430 ss body/ Cold rolled plate
Switch	3-Speed touch swItch
LIghtIng	2x1.25W LED
Filter	3-Layer aluminum grease filter
AIrflow	
HousIngK(1x230W)-750m3h HousIng P1 (1x130W)-500m3h Housing s(1x65W)-350m3/h	
Optional	
AlumInum exhaust pIpe	
SIze	
520mm	
Loading(20'GP / 40'HQ)	
402/938 pcs(520mm)	





MG01 Specification


Material:	Inox Aisi 430 Tempered Glass
Switch:	Push Button
Filter:	3 Speeds 1 pcs Aluminum Filter(60/70cm) 2 pcs Aluminum Filters(90cm)
Lighting:	2x2W LED Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	500+500mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	192/404/479(60cm) 124/252/275(90cm)





MG02 Specification


Material:	Inox Aisi 430 Tempered Glass
Switch:	Touch Control
Filter:	3 Speeds 2 pcs Aluminum Filters SS Perimeter Filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	550m3/h
Motor Type:	1x100W
Chimney Extension:	500+500mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	124/256/300(90cm)





MG03 Specification


Material:	Inox Aisi 430 Tempered Glass
Switch:	Push Button 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	1x2W LED Lamp
Extraction Power:	350m3/h
Motor Type:	1x65W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	350/720/850(60cm) 220/470/550(90cm)





MG04 Specification


Material:	Inox Aisi 430 Tempered Glass
Switch:	Touch Control 3 Speeds
Filter:	1 pcs Stainless Steel filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	500+500mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	120/240/240(90cm)





MV04X Specification


Material:	Black Paint Black Paint panel
Switch:	Push Button 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	2x2W LED Lamp
Extraction Power:	350m3/h
Motor Type:	1x65W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	270/570/683(60CM)





MV05D Specification


Materia	Black Paint Black Tempered Glass
Swwitch	Touch Control With LCD Display 3 speeds Remote Control Auto Open-Close System
Filter	1 pcs Aluminum Filter
Lighting	2x1.5W LED Lamp
Extraction Power	750m3/h
Motor Type	1x210W
Air Outlet	150mm
Loading arY(20/40/HQ)	96/216/270(60cm) 80/164/205(90cm)





MV06D Specification


Material:	Black Paint Black Tempered Glass
Switch:	Touch Control 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	128/288/360(60cm) 96/192/240(90cm)





MV07D Specification


Material:	Black Paint Black Tempered Glass
Switch:	Touch Control
Filter:	3 Speeds 1 pcs Aluminum Filter(60cm) 2 pcs Aluminum Filters(90cm)
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	128/288/360(60cm) 96/192/240(90cm)

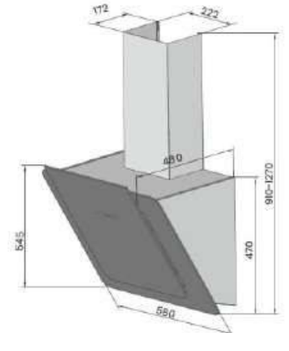



MV08D Specification


Material:	Black Paint Black Tempered Glass
Switch:	Touch Control 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	108/240/240(58cm)






MV09D Specification

Material:	Black Paint Black Tempered Glass
Switch:	Touch Control 3 Speeds
Filter:	1 pes Aluminum Filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	128/288/360(60cm) 96/192/240(90cm)



MV10X Specification


Material:	Black Paint Black Tempered Glass
Switch:	Push Button 3 Speeds
Filter:	1 pcs Aluminum Filter
Lighting:	2x2W LED Lamp
Extraction Power:	350m3/h
Motor Type:	1x65W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	240/492/525(60cm) 160/328/350(90cm)





MV10X Specification


Material:	Inox AIsI 430
Switch:	Push Button 3 Speeds
FIlter:	1 pcs AlumInum FIlter
Lighting:	2x2W LED Lamp
Extraction Power:	350m3/h
Motor Type:	1x65W
Chimney Extension:	400+400mm
Air Outlet:	120mm
Loading ary(20/40/HQ)	240/492/525(60cm) 160/328/350(90cm)





MX11D Specification


Material:	Black Paint Black Tempered Glass+nox Aisi430
Switch:	Touch Control 3 Speeds
Filter:	1 pcs AlumInum FIlter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	96/216/270(60CM) 80/172/208(90CM)





MV12D Specification


Material:	Black paint Blacktempered glass
Switch:	Motion &Touch control Heat Auto-cleanfunction
Filter:	Filterless
Lighting:	2x1.5W LED
Extraction Power:	900m3/h
Motor Type:	1x220W
Chimney Extension:	1x400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	160pcs/340pcs/408pcs





MV13D Specification


Material:	Black Paint BlackTempered Glass+nox Aisi430
Switch:	Touch Control 3 Speeds
FIlter:	1 pes Aluminum Filter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	96/192/240(90cm)





MV03D Specification

Material:	Inox AIsI430 Black Tempered Glass
Switch:	Touch Control 3 Speeds
FIlter:	1 pcs AlumInum FIlter
Lighting:	2x1.5W LED Lamp
Extraction Power:	750m3/h
Motor Type:	1x210W
Chimney Extension:	400+400mm
Air Outlet:	150mm
Loading ary(20/40/HQ)	164/336/420(60cm) 88/192/240(90cm)



Slant Cooker hood

Note:

Note: